

DH-PFM920I-5EUN

305m UTP CAT5E Cable



Features

- 305m UTP CAT5E
- Max.160m long distance PoE supply
- 99.99% OFC(oxygen free copper) Excellent material
- Environmentally friendly PVC



Technical Specifications

| Model | | DH-PFM920I-5EUN |
|--|-------------------------|---|
| Conductor | Material | OFC(oxygen free copper) |
| | Composition | 1/0.45 |
| | Wire gauge | 0.45*4P±0.005mm |
| Insulation | Material | HDPE |
| | Min. average thickness | 0.2mm |
| | Diameter | 0.83mm±0.03mm |
| | Color(4 Pairs) | Orange, white/orange; green, white/green; blue, white/blue; brown, white/brown |
| Lay of twisted conductors | | 140mm |
| Jacket | Material | PVC |
| | Min. average thickness | 0.5mm±0.05mm |
| | Diameter | 4.7mm |
| | Color | Orange |
| Length | | 305m (1000.66ft) |
| Max. DC resistance of single conductor | | 12 Ω/100m |
| Max. unbalance rate of line pairs' direct current resistance | | 12% |
| Min. insulation resistance | | 5000MΩ • km |
| Max. mutual capacitance | | 5.6NF/100m |
| Max. attenuation | | 22(dB/100m, 100MHz) |
| General | N.W. | 7.8kg |
| | Packaging dimension | 360mmx360mmx220mm |
| | Weight (with packaging) | 8.6kg |

Order Information

| Type | Part Number | Description |
|-------|-----------------|---|
| Cable | DH-PFM920I-5EUN | 305m UTP CAT5E cable _Dahua brand; Distribution |

Dimensions (mm/inch)

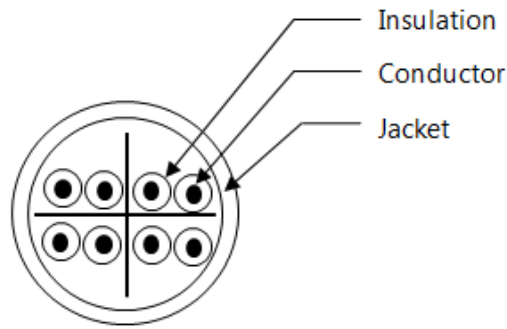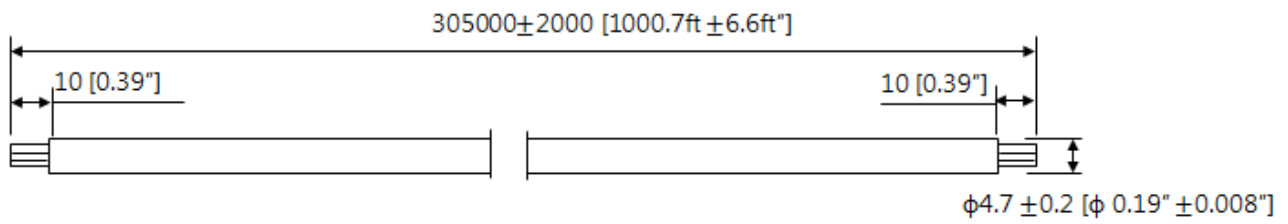

Package Information

- 305m UTP CAT5E cable *1