


2MP WIFI IR NETWORK DOME CAMERA

PRO
SERIES

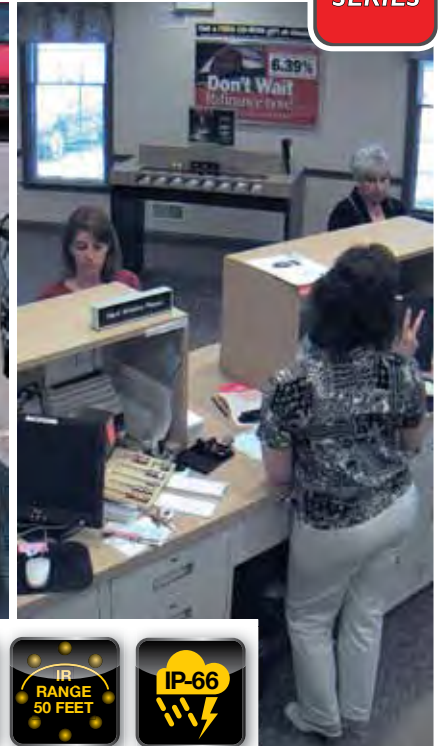

IPC-2MPSR50w - 2-MP PRO-Series All-Weather IR-50' Range 2.8-12mm Varifocal Network Dome Camera + 2.4GHz WiFi Connect

PRO-Series 2-MegaPixel All-Weather Network Dome Camera with **WiFi connection up to 300 feet**. Featuring a **2.8-12.0mm varifocal lens** and **infrared night-vision up to 50 feet**, this all-in-one camera is perfect for day & night surveillance applications including: Parking lots, offices, schools, hospitals and other high-risk areas where pulling cable is not possible, convenient or economical.



ADVANTAGES

- High Definition H.264 **2-MegaPixels (1920 x 1080) @ 30fps**
- **High-Intensity Night-Vision Range up to 50 Feet**
- **Dynamic 2.8mm-12.0mm Varifocal Zoom Lens**
- Convenient WiFi Network Access up to 300 Feet Line-of-Sight
- Vandal-resistant IP-66 rated all-Weather Design
- ONVIF Compliant for Easy Installation
- Includes License-Free 64 Channel Client Management Software
- Perfect for Parking Lots, Offices, Schools, Hospitals and Other High-Risk Areas
- 100% Performance Guarantee & World Class Technical Support

APPLICATIONS INCLUDE

IPC-2MPSR50w



SPECIFICATIONS

OPERATING FREQUENCY	2.4GHz - 2.48GHz
MODULATION	DBPSK, DQPSK, CCK, QFDM, 16-QAM, 64-QAM
CAMERA TYPE	1/2.8" SONY Exmor IMX222 CMOS Sensor + Dual Core 32 Bit DSP
RESOLUTION	Main Stream: 2MP @ 30fps (1920 x 1080) / Sub Stream: D1 (704 x 576) CIF (352 x 288)
RANGE (LINE-OF-SIGHT)	WiFi Range up to 300 Feet
VIDEO FORMAT	NTSC / PAL
STANDARDS	ONVIF
CAMERA LENS TYPE	2.8-12mm Varifocal Zoom with 28°~112° Viewing Angle
CAMERA S/N RATIO	>60dB (Enhanced)
CAMERA SYNC / WHITE BALANCE	Automatic
CAMERA ELECTRONIC SHUTTER	1/50~1/10,000 Seconds
CAMERA IR RANGE	IR Array up to 50 Feet
CAMERA MINIMUM ILLUMINATION	Color: 0.01 Lux / B&W 0.001 Lux
CAMERA IR CUT FILTER	Automatic / Mechanical
VIDEO COMPRESSION	H.264
ANTENNA TYPE	3dB Omni-Directional Rubber Duck
ANTENNA CONNECTOR	SMA-Female
PROTOCOL	TCP/IP, HTTP, DHCP, DNS, DDNS, PPPoE, SMTP, NTP
DATA RATE	0.1Mbps~8Mbps
COMMUNICATION PORT	RJ-45 @ 10/100Mbps Base-T Ethernet LAN
POWER SUPPLY	Sold Separately - #PS-121C
POWER CONNECTOR	2.1mm Barrel (12VDC Only)
CAMERA CURRENT CONSUMPTION	600mA @ 12VDC (IR ON)
CAMERA CONSTRUCTION	Rugged All-Weather IP-66 Rated Cast Aluminum Design + Polycarbonate Dome
CAMERA DIMENSIONS	4.5" x 5.5" (115mm x 140mm)
CAMERA WEIGHT	0.83KG (1.8lbs)
ANTENNA DIMENSIONS	6" x 1" (152mm x 25mm)
OPERATING TEMPERATURE RANGE	-40°F to +170°F (-40°C to 77°C)
SOFTWARE	Includes License-Free 64 Channel Client Management Software
NOTE	Requires Access to a 2.4GHz 802.11b/g Wireless Network



Optional Wall Mount
#BRK-IPC50WM

KIT INCLUDES

- WiFi NETWORK DOME CAMERA
- CLIENT MANAGEMENT SOFTWARE
- 2.4GHz RUBBER DUCK ANTENNA
- 100% PERFORMANCE GUARANTEE
- OWNER'S MANUAL
- ONE YEAR LIMITED WARRANTY



Specifications are Subject to Change Without Notice

1016C Sutton Drive, Unit 6, Burlington, ON Canada L7L 6B8
Tel: 905.336.9665 Fax: 905.336.9662 www.VideoTransmitters.com

VIDEO COMM
TECHNOLOGIES

© Copyright 2015 1156488 Ontario Inc.