

Trilogy audit trail and programming

AL-IR1 Infrared Printer

- Prints the event log and user code with hand-held convenience.

AL-DTMIII Data Transfer Module

- Module used to transfer program data from the PC to the lock and receive Audit Trail from the lock. Can transfer program data for up to 200 locks.

AL-PRE

- Alarm Lock Prox Reader/Enroller (For Use With Prox Lock) Prox Card Reader/Enroller Enables instant, automatic enrollment of Prox Cards into DL-Windows (just tap the Prox Card/fob device to the unit's faceplate to enroll)! Supports all prox cards and prox keyfobs. Simultaneous card enrollment, downloading or lock polling – all on just one serial port. Replaces AL-PCI. 9V Battery operation (6 mos. to 1 year, typical).

DL-WINDOWS SOFTWARE

- Windows-format software used to create programming, manager, users and schedules, receive audit trail from lock, program the lock using PC or laptop, program the AL-DTMIII to program multiple locks and configure the AL-DTMIII to transfer data.
- Free download at www.alarmlock.com

AL-PCI2 (not shown)

- Interface cable interconnects lock and PC for data transfer. (AL-PCI also includes DL-WINDOWS CD)

AL-PCI2U, (shown) as above, with USB interface cable



Remote Release Kit

RR-TRILOGYKIT

- Remote release kit for all Trilogy Cylindrical models includes the RR-1BUTTON for desk mount applications and RR-RECEIVER which is designed to be installed inside the battery compartment next to the battery pack of any cylindrical Trilogy lock. The RRRECEIVER connects to the 2 white remote release wires inside the battery compartment and to the black and red battery pack wires to power the receiver. These kits will retro fit to any existing cylindrical Trilogy manufactured since 1994.



Choice of three Trilogy finishes



US3 Polished Brass



US26D Satin Chrome



US10B Duronodic

U.S. Handing options



00 Straight Lever



75 Regal Curved Lever



25 Turnpiece
50 Knob available on
DL1250/1350

Matching Trilogy & Networkx Keypad models, see pgs 14 & 17

Trilogy & Networkx ordering information

Cylindrical Trilogys

DL 27 00 WP IC /26D -Y

Model/Series:

- DL27 = DL2700 Series
- DL28 = DL2800 Series
- DL30 = DL3000 Series
- DL32 = DL3200 Series
- DL52 = DL5300 Series
- PDL30 = PDL3000 Series
- PDL53 = PDL5300 Series

Networkx Wireless:

- DL6100 PIN Series;
- PDL6100, 7100 PIN/Prox

Trim:

- 00 = Lever
- 75 = Regal Curved Lever

Exterior/Interior Use:

For Exterior use of DL2700 & DL3000 only, order WP for weatherproof use. All other models are weatherproof as standard.

Cylinder:

IC = Standard Interchangeable Core Prep for Best, Falcon, Arrow, KSP
(Note: No "IC" indicates standard K.O. cylinder.)

Finish:

- /3 = US3 Polished Brass
- /26D = US26D Satin Chrome
- /10B = Duronodic (Special Order)

Special Order IC Prep:

- Y = Yale
- M = Medeco
- R = Sargent
- C = Corbin/Russwin
- S = Schlage

Mortise Trilogys

DL 35 00 DB R /26D EX

Model & Series:

DL35 = Trilogy T3 Mortise Series

Networkx Wireless:

DL6500 PIN; PDL6500 PIN/Prox

Trim:

- 00 = Standard Lever
- 75 = Regal Curved Lever (U.S. Option Only)

Lock Body:

- DB = Dead Bolt
- CR = Class Room (U.S. Only)

Handing:

Your Door -	Order -
Left Handed	L
Right Handed	R
Left Hand Reverse Bevel	R
Right Hand Reverse Bevel	L

(Note: Trim is non-handed. Lock body is field reversible.)

Finish:

- /3 = US3 Polished Brass
- /26D = US26D Satin Chrome
- /10B = Duronodic (Special Order)

European Model Suffix

Not Used For U.S. Models
*Note: Standard Lever for U.S. Models is Straight Lever. Standard Lever for European Models is Curved Tubular Lever

Trilogy Narrow Style

DL1200/26D1

Model Type

- PDL – Prox/PIN
- DL – Digital PIN

Trilogy Series

- 12 – 2700 Series
- 13 – 3000 Series

Trim

- 00 = Lever
- 25 = Turnpiece
- 50 = Knob
- 75 = Regal lever

Finish

- /26D Satin Chrome
- /10B Duronodic
- /MS Metallic Silver
- /MB Metallic Bronze

Mechanical Dead Latch

- 1 – Supports Adams Rite: 4710, 4730, 4900 Series
- 2 – Supports Adams Rite: 4070, MS1850S, MS1850S-050, MS1950, MS1950-050
- 3 – KIT Includes Adams Rite 4900 with 1-1/8" backset, 628 & 313 faceplate
- 4 – KIT Includes Adams Rite 4900 with 1-1/2" backset, 628 & 313 faceplate

Trilogy Exit

ETPDL- 1 R/ 26D V99

Type:

- PDL = Digital with Prox
- PL = Prox Only
- DL = No Prox
- N = (suffix) Networkx Wireless

Door Thickness:

- 1 = 1 3/4" + 1/8"
- 2 = 2" to 2 3/4"
- 3 = 3" to 4"

Handle:

- R = Regal
- S = Straight

Finish:

- /3 = US3 Polished Brass
- /26D = US26D Satin Chrome
- /10B = Duronodic (Special Order)

OEM Trim

- V99 = Von Duprin 99
- C50 = Corbin ED5000 & Yale
- D93 = Dorma 9300
- A38 = Arrow 3800
- S88 = Old Style Sargent
- N58 = New Style Sargent
- P11 = Precision 1100
- CR8 = Cal Royal 9800

Trilogy Networkx: Wireless networking locks



networkx
by Trilogy

Wireless Trilogy Networkx™ Locks supports 802.11 or ethernet

DL6100 & prox/PIN version PDL6100


Trilogy Networkx Locks eliminate door-to-door programming and audit trail retrieval by communicating wirelessly via Ethernet or 802.11B/G, while providing all original Trilogy standalone lock's functionality. They provide a quick, easy, economical access system with advanced features & functions, like automatic schedules, event logs and support for 2000 doors and 5000 existing Prox. ID Cards/Badges, but with no wires to run, and no access panels or power supplies to buy or install. At its simplest it's one Grade 1 durable wireless lock per door, installed in about an hour, all communicating to a single Gateway (each gateway controls up to 63 locks), networked to any non-dedicated Windows-based PC. In addition to Wireless Trilogy Networkx' unsurpassed battery-life, exceeding 5 years, they feature new network-wide capabilities, executed from any lock or the network's PC, including emergency priority global lockdown deployed in seconds, and you can activate (non-priority) system-wide free-passage or locking modes from the PC. For existing Trilogy installations, original standalone and new Trilogy Networkx locks can seamlessly share one common database hosted on free Alarm Lock DL-WINDOWS software.

- **Trilogy Networkx Locks communicate wirelessly via Ethernet or 802.11B/G** for a comprehensive wireless networked door access control system, eliminating door-to-door programming and audit trail

retrieval and providing all standalone Trilogy lock functionality plus new network-wide and emergency lockdown features

- **Unsurpassed 5-year+ battery life, typical**, (Automatic battery status reports at the PC; visual and audible low-battery status indicators at lock(s).)
- **Trilogy Networkx and gateway modules have an integral transceiver for highly-efficient 900MHz bidirectional communications**, for longer range and less interference than with more common 2.4GHz spread spectrum devices. Alarm Lock devices require NO wiring; NO splitters or repeaters; NO hardwiring to the host/server; NO extra power supplies; and NO access controller/panels.
- **In 10 seconds, activate emergency global lockdown from the Networkx PC or any Networkx lock**. (This priority emergency command is lightning-fast system-wide and supercedes all scheduled programs or updates, etc. However, if desired, locks may be selectively programmed to be excluded from emergency global lockdown function, i.e., they will ignore the command.)
- **System-wide free-passage enable or disable**, can likewise be activated from the Networkx PC
- **Locks support up to 5000 users with 3-6 digit numeric PIN codes and PDL-Series also support prox ID card users** (virtually all HID™ format proximity technology ID cards, fobs, credentials.)

- **On demand, in seconds, wirelessly change users, schedules, lock features or retrieve audit trails of up to 40,000 events/lock from any networked PC.** (Note: Transaction processing time is dependent upon system capacity, the more locks/gateways and the more data to be up/downloaded, the longer the time.)
- **Unattended programming updates or event log retrievals can be scheduled** to run automatically, saving manpower and productive time.
- **Seamless upgrade path for original Trilogy users:** Intermix with existing Trilogy standalone lock installations and share one database and familiar Trilogy lock and software functions: Trilogy Wireless Network Locks seamlessly integrate in an existing Alarm Lock Trilogy standalone door access system and share the same single DL-WINDOWS database (requires v4.1.x or higher). Existing Trilogy users can easily add one wireless Networkx Lock, or as many as two thousand, to an existing system seamlessly with no downtime.

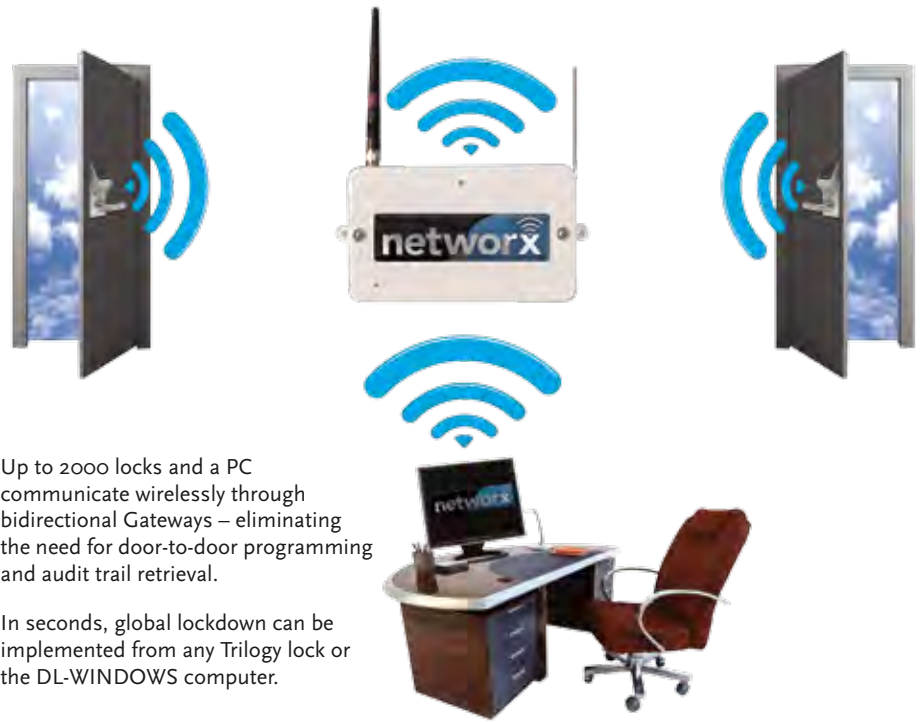

Up to 2000 locks and a PC communicate wirelessly through bidirectional Gateways – eliminating the need for door-to-door programming and audit trail retrieval.

In seconds, global lockdown can be implemented from any Trilogy lock or the DL-WINDOWS computer.

- **Secure 128bit AES PC encryption and proprietary RF-link lock communication encryption** protects the system from interference or tampering (WEP or WPA compatible with wireless modem).
- **Remote System Management:** VPN-connection /remote capability for accessing the Networkx System and controlling up to all 2000 locks, with all the security and peace-of-mind of your IT network. (No special modems required.)
- Wireless locks are fully keypad programmable and can be up and functioning even before their wireless network is configured, so IT departments don't have to coordinate with physical security departments or locksmiths
- Free Alarm Lock DL-WINDOWS software doesn't require a dedicated computer or a special computer network or costly server software licenses, it simply runs as a secure Microsoft Windows-based application, on any computer system (as basic as a desktop or laptop PC), a wired or wireless router, and a gateway module or on an internal LAN with static IP address (recommended). MS XP and Vista supported (v4.1.x or higher).
- Minimizing hardware & installation costs, a single gateway module can interface between the PC network and up to 63 Networkx locks, with a range of up to 900' clear field range or up to 200' depending on building construction. At its maximum, a Trilogy Networkx system can comprise up to 32 gateways for the networking of up to 2000 locks or access controlled doors.
- Wall- or ceiling-mountable, compact gateway modules are available in wireless/hardwired and wired-only versions (with Power Over Ethernet (POE) option). The hybrid model connects using either 802.11, Ethernet cable or 100Base-TX (using RJ45

Jack); the wired versions use an RJ-45 Ethernet cable. Networkx communications support both wired Ethernet 10BaseT and wireless 802.11.

- For the fastest most reliable networked system, in discovery setup mode, the system will locate and DL-WINDOWS will display each lock's signal strength at each installed gateway, so you can select it and optimize reliable communications and eliminate guesswork.
- Lock programming, user- and usage-data are stored locally at the battery-powered lock for uninterrupted door access usage in a power outage or server offline situation.

Enterprise Networks

- Networkx locks can be used as wireless, single-door controllers in real time too
- Use with Continental Access® CA3000 or Lenel OnGuard® Integrated Access Control & Video Security Platforms



CardAccess 3000

Trilogy Networkx Lock Specifications:

- Weatherproof locks for indoor/outdoor use with wide operating temperature range (-31 to 151° degrees F).
- Cylindrical models boast industrial strength BHMA Grade 1 durability and all models feature vandal-resistant all-metal keypad for 900' clear field range or up to 200' depending on building construction. At its maximum, a Trilogy Networkx system can comprise up to 32 gateways for the networking of up to 2000 locks or access controlled doors.
- PDL6100 version, also has built in HID Prox. Reader.
- ADA-compliant leversets. • Easy-to-install modified ANSI A115 Series door prep; easily and neatly retrofit standard cylindrical knobsets and mechanical standalone locks, in under an hour. Non-handed
- 3 hour UL fire-rated deadlatch.
- Supports 1-5/8 to 1-7/8" door thickness; 2-3/4" backset (2-3/8" available.)
- Manual key override standard; most IC cores also supported on interchangeable core models.

- Wide choice of 3 Architectural finishes (US3 polished brass, 26D satin chrome, 10B duronodic) and IC core preps (6-7pin).

Network Interface

INTERFACE: Ethernet 10Base-T or 100Base-TX (using RJ45 Jack)

PROTOCOLS: TCP/IP, UDP/IP, DHCP 802.11 Wireless Specifications

WIRELESS STANDARDS: IEEE 802.11b; 802.11g

FREQUENCY RANGE: 2.412 - 2.484 GHz

OUTPUT POWER: 14 dBm + 1.5 dBm/-1.0 dBm

MAXIMUM RECEIVE LEVEL: -10dBm (with PER < 8%)

DATA RATES WITH AUTOMATIC FALLBACK: 54Mbps - 1Mbps

RANGE: Up to 328 feet indoors

MODULATION TECHNIQUES: OFDM, DSSS, CCK, DQPSK, DBPSK, 64 QAM, 16 QAM

INTERFACE: Wireless 802.11b, 802.11g and 10/100 Ethernet

PROTOCOLS: TCP/IP, UDP/IP, DHCP

SECURITY

- IEEE 802.11 - PSK with AES Encryption 128-bit Encryption
- 128-bit AES Rijndael encryption

A.L. Radio Link

- 900 MHz GFSK, 50 channels, 10mW power output

VOLTAGE: 5 - 6 volts AC/DC

OPERATING TEMPERATURE: -20° to 60°C (-4° to 140°F)

STORAGE: -40° to 85°C (-40° to 185°F)

AVERAGE POWER CONSUMPTION:

- 1300 mW (WLAN mode; maximum data rate)
- 300 mW (WLAN mode; idle)
- 750 mW (Ethernet Mode)

PEAK SUPPLY CURRENT: 650 mA

INPUT VOLTAGE: 5 - 6 volts AC/DC

OPERATING TEMPERATURE: -31 to 151° degrees F

STORAGE TEMPERATURE: -40° to 85°C (-40° to 185°F)

No network activity or bandwidth usage until user operates DL Windows software to send programming to or receive log data from locks. Exception, during emergency lockdown command Gateways communicate through the network. Gateways will send less than 1000 bytes during emergency command.

Trilogy Networkx: A wireless model for every application



More Networkx Models & Options:

PDL6100 Cylindrical Trilogy® Networkx™ PIN/Prox. Wireless Access Control Lock with built in HID proximity ID card reader, full-metal digital keypad, integral bi-directional radio, 4-C cell battery-operated (batts. supplied), serial number ID card, standard format SCI keyway for manual key override, 4-7/8" ASA Strike (includd).

DL6100 Cylindrical Trilogy Networkx PIN-Code Wireless Access Control Lock, as above, with full-metal digital keypad only.

PDL6500 Trilogy® Networkx™ PIN/Prox. Wireless Access Control Mortise Lock with built in HID proximity ID card reader, full-metal digital keypad, integral bi-directional radio, 4-C cell battery-operated (batts. supplied), serial number ID card, standard format SCI keyway for manual key override, 4-7/8" ASA Strike (includd).

DL6500 Trilogy Networkx PIN-Code Wireless Access Control Mortise Lock, as above, with full-metal digital keypad only.

PDL7100 Cylindrical Trilogy Networkx™ iClass™ Prox. Wireless Access Control Lock with built in 13.56 MHz iClass HID proximity ID card reader /enroller, full-metal digital keypad, integral bi-directional radio, 4-C cell battery-operated (batts. supplied), serial number ID card, standard format SCI keyway for manual key override, 4-7/8" ASA Strike (includd).

PDL7500 Mortise version of above

ETDLN TrilogyExit Clutch Mechanism insures long life and durability. Fingertip and/or Windows programmable, 2000 User Codes: Master, manager, supervisor and users, Real Time Clock for up to 35,000 Event Time/Date-Stamped Audit Trail and Up to 500 Lock/Unlock Schedules (with Time Zone Support). Rugged 12-Button Metal Keypad, non-Handed; Fully Field Reversible. Adaptable to most major manufacturers of standard RIM and IC RIM Cylinder. Supports most panic exit devices, including Von Duprin, Corbin, Yale, Dorma, Arrow, Sargent, Precision and Cal Royal

ETPDN Networkx Prox Trilogy Exit model for added convenience and security. Includes all of the features above plus: Accepts most HID Proximity cards and keyfobs; Users are individually programmed to use a card only, code only, or for highest security – both card and code. Prox card data can be added to software by uploading from lock, by using AL-PRE or entering directly from computer using DL-WINDOWS Networkx software.

RR-4BKEYFOB Optional remote release keyfob (shown).

RR-1BUTTON Optional desk-mount version of above.

DL-WINDOWS

Free Alarm Lock Trilogy Microsoft Windows-based software application, v4.0.1 or higher, supports Trilogy Networkx and Trilogy standalone locks, with single database. No-charge, downloadable online at www.alarmlock.com

AL-IM80211

Hardware/Wireless Gateway Interface Module, with integral bi-directional radio, interfaces Networkx locks with PC network with hardwired Ethernet and wireless 802.11. Powered with Class 2, 6VAC transformer (supplied). Supports up to 63 Networkx Locks. Two antennas. Ceiling or wall mountable.

AL-IME Hardware Gateway Interface Module, supports up to 63 Networkx Locks, similar to above, but using hardwired connection to the network via RJ45 Ethernet cable. One antenna. Powered with Class 2, 6VAC transformer (supplied). Ceiling or wall mountable.

AL-IMEPOEP Hardware Gateway Interface Module + POE, supports up to 63 Networkx Locks, as above, but using hardwired Ethernet and Power Over Ethernet (P.O.E.). Connects directly to a network via Ethernet cable. One antenna. Ceiling or wall mountable.



Add Networkx Trilogy convenience, programming, flexibility, audit trail and wireless connectivity to panic exit devices from most major manufacturers

Turn Standalone Trilogy Locks into Wireless Networkx Locks with New Field Upgrade Kits for Standalone PIN or PIN/Prox Cylindrical or Mortise Models. Call for more or go to <http://www.alarmlock.com/networkupgradekits.html>

Trilogy & Networx: Standalone and Wireless Access

MODEL/ FEATURE	DL2700	DL2800	DL3000	PDL3000	DL3200	DL3500	PDL3500	DL4100	PDL4100	DL4500	PDL4500	DL5200	DL5300	PDL5300	DL6100	PDL6100
Lock Type	Cylindrical	Cylindrical	Cylindrical	Cylindrical Prox	Cylindrical	Mortise	Mortise Prox	Cylindrical	Cylindrical Prox	Mortise	Mortise Prox	Cylindrical	Cylindrical	Cylindrical Prox	Cylindrical 802.11 Ethernet	Cylindrical Prox 802.11 Ethernet
User Codes	100	200	300	2000	2000	300	2000	2000	2000	2000	2000	100	2000	2000	5,000	5,000
Code Length	3-6 digits	3-6 digits	3-6 digits	3-6 digits	3-6 digits	3-6 digits	3-6 digits	3-6 digits	3-6 digits	3-6 digits	3-6 digits	3-6 digits	3-6 digits	3-6 digits	3-6 digits	3-6 digits
Programming	Keypad only	Keypad /PC	Keypad /PC	Keypad /PC	Keypad /PC	Keypad /PC	Keypad /PC	Keypad /PC	Keypad /PC	Keypad /PC	Keypad /PC	Keypad only	Keypad /PC	Keypad /PC	Keypad /PC	Keypad /PC
Vandal-Proof Keypad	All metal, 12 button	All metal, 12 button	All metal, 12 button	All metal, 12 button	All metal, 12 button	All metal, 12 button	All metal, 12 button	All metal, 12 button	All metal, 12 button	All metal, 12 button	All metal, 12 button	Dual sides, All metal, 12 button	Dual sides, All metal, 12 button	Dual sides, All metal, 12 button	All metal, 12 button	All metal, 12 button
Trim w/Rugged Clutch	Straight or curved lever	Straight or curved lever	Straight or curved lever	Straight or curved lever	Straight or curved lever	Straight or curved lever	Straight or curved lever	Straight or curved lever	Straight or curved lever	Straight or curved lever	Straight or curved lever	Straight or curved lever	Straight or curved lever	Straight or curved lever	Straight or curved lever	Straight or curved lever
Audit Trail Events		1000	1600	40000	40000	40000	40000	40000	40000	40000	40000		40000	40000	35,000	35,000
Scheduled events		150	150	500	500	500	500	500	500	500	500		500	500	500	500
Proximity Reader				Prox HID			Prox HID		Prox HID		Prox HID			Prox HID		Prox HID
Privacy Lockout								Privacy/ Lock-out	Privacy/ Lock-out	Privacy/ Lock-out	Privacy/ Lock-out				Global lockdown	Global lockdown
Classroom/ Deadbolt						CR or DB	CR or DB			DB	DB					
Weather-proof -31 to 151° F	WP version	Standard	WP version	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard
Handing	Nonhanded	Nonhanded	Nonhanded	Nonhanded	Nonhanded	Handed; Field Reversible	Handed; Field Reversible	Nonhanded	Nonhanded	Handed;	Handed;	Nonhanded	Nonhanded	Nonhanded	Nonhanded	Nonhanded
Door Thickness	1-5/8 to 1-7/8" (others on request.)	1-5/8 to 1-7/8" (others on request.)	1-5/8 to 1-7/8" (others on request.)	1-5/8 to 1-7/8" (others on request.)	1-5/8 to 1-7/8" (others on request.)	1-5/8 to 1-7/8"	1-5/8 to 1-7/8"	1-5/8 to 1-7/8" (others on request.)	1-5/8 to 1-7/8" (others on request.)	1-5/8 to 1-7/8"	1-5/8 to 1-7/8"	1-5/8 to 1-7/8" (others on request.)	1-5/8 to 1-7/8" (others on request.)	1-5/8 to 1-7/8" (others on request.)	1-5/8 to 1-7/8" others upon request	1-5/8 to 1-7/8" others upon request
Backset	2-3/4" (included); 2-3/8" option.	2-3/4" (included); 2-3/8" option.	2-3/4" (included); 2-3/8" option.	2-3/4" (included); 2-3/8" option.	2-3/4" (included); 2-3/8" option.	2-3/4" (included)	2-3/4" (included)	2-3/4" (included); 2-3/8" option.	2-3/4" (included); 2-3/8" option.	2-3/4" (included)	2-3/4" (included)	2-3/4" (included); 2-3/8" option.	2-3/4" (included); 2-3/8" option.	2-3/4" (included); 2-3/8" option.	2-3/4" (included); 2-3/8" opt.	2-3/4" (included); 2-3/8" opt.
Cylinder	Large key-in-knob, incld -or- IC Prep for Best/Falcon/ Arrow (w/o cyl.d.)	Large key-in-knob, incld -or- IC Prep for Best/Falcon/ Arrow (w/o cyl.d.)	Large key-in-knob, incld -or- IC Prep for Best/Falcon/ Arrow (w/o cyl.d.)	Large key-in-knob, incld -or- IC Prep for Best/Falcon/ Arrow (w/o cyl.d.)	Large key-in-knob, incld -or- IC Prep for Best/Falcon/ Arrow (w/o cyl.d.)	Generic mortise cylinder, supplied.	Generic mortise cylinder, supplied.	Large key-in-knob, incld -or- IC Prep for Best/Falcon/ Arrow (w/o cyl.d.)	Large key-in-knob, incld -or- IC Prep for Best/Falcon/ Arrow (w/o cyl.d.)	Generic mortise cylinder, supplied. Other cams available for cylinders	Generic mortise cylinder, supplied. Other cams available for cylinders	Large key-in-knob, incld -or- IC Prep for Best/Falcon/ Arrow (w/o cyl.d.). One cyl.d. needed for each side of door	Large key-in-knob, incld -or- IC Prep for Best/Falcon/ Arrow (w/o cyl.d.). One cyl.d. needed for each side of door	Large key-in-knob, incld -or- IC Prep for Best/Falcon/ Arrow (w/o cyl.d.). One cyl.d. needed for each side of door	Large key-in-knob, incld -or- IC Prep for Best/Falcon/ Arrow (w/o cyl.d.)	Large key-in-knob, incld -or- IC Prep for Best/Falcon/ Arrow (w/o cyl.d.)
Special Order Cylinders	Yale, Medeco, Sargent, Corbin/ Russwin, Schlage	Yale, Medeco, Sargent, Corbin/ Russwin, Schlage	Yale, Medeco, Sargent, Corbin/ Russwin, Schlage	Yale, Medeco, Sargent, Corbin/ Russwin, Schlage	Yale, Medeco, Sargent, Corbin/ Russwin, Schlage			Yale, Medeco, Sargent, Corbin/ Russwin, Schlage	Yale, Medeco, Sargent, Corbin/ Russwin, Schlage			Yale, Medeco, Sargent, Corbin/ Russwin, Schlage	Yale, Medeco, Sargent, Corbin/ Russwin, Schlage	Yale, Medeco, Sargent, Corbin/ Russwin, Schlage	Yale, Medeco, Sargent, Corbin/ Russwin, Schlage	Yale, Medeco, Sargent, Corbin/ Russwin, Schlage
Relay options	yes		yes	yes	yes	yes	yes	yes	yes	yes	yes	no	no	no	yes	yes
Battery/ Cycles Typical	5AA; 200000	5AA; 100000	5AA; 100000	5AA; 60000	5AA; 100000	5AA; 100000	5AA; 60000	5AA; 100000	5AA; 60000	5AA; 60000	5AA; 60000	5AA; 80,000	5AA; 100000	5AA; 60000	4 C cells 5 years 500,000	4 C cells 5 years 500,000
Ratings	BHMA Grade 1 Lockset; 3hr. Fire Rated UL	BHMA Grade 1 Lockset; 3hr. Fire Rated UL	BHMA Grade 1 Lockset; 3hr. Fire Rated UL	BHMA Grade 1 Lockset; 3hr. Fire Rated UL	BHMA Grade 1 Lockset; 3hr. Fire Rated UL	3 Hr Fire Rated UL	3 Hr Fire Rated UL	BHMA Grade 1 Lockset; 3hr. Fire Rated UL	BHMA Grade 1 Lockset; 3hr. Fire Rated UL	3 Hr Fire Rated UL	3 Hr Fire Rated UL	BHMA Grade 1 Lockset; 3hr. Fire Rated UL	BHMA Grade 1 Lockset; 3hr. Fire Rated UL	BHMA Grade 1 Lockset; 3hr. Fire Rated UL	BHMA Grade 1 Lockset; 3hr. Fire Rated UL	BHMA Grade 1 Lockset; 3hr. Fire Rated UL
Architectural Finishes	US26D, US3, 10B	US26D, US3, 10B	US26D, US3, 10B	US26D, US3, 10B	US26D, US3, 10B	US26D, US3, 10B	US26D, US3, 10B	US26D, US3, 10B	US26D, US3, 10B	US26D, US3, 10B	US26D, US3, 10B	US26D, US3, 10B	US26D, US3, 10B	US26D, US3, 10B	US26D, 10B	US26D, 10B

LEGEND:

Privacy -  Narrow Stile -  Network Wireless -  Double-Sided -  Keypads - 

(Note: Also see ordering information charts pg. 13)