

Code or key. You decide.

Keypad locks

Say goodbye to lost, stolen and just plain forgotten keys. With an easy-to-install Schlage keypad, coming and going is keyless, effortless – and painless.

Keyless option makes sharing access easier and more secure

- Back-lit keypad
- Silicone-coated keypad prevents numbers from wearing off
- Ideal for: front door, garage door, home office, wine cellar or utility closet
- Low battery indicator

Choose your own access codes

- Create and delete codes for visiting friends and family
- Memory for 19 access codes

Express your style

- Available in a variety of durable finishes to complement your home's style
- Sleek knob and lever options coordinate with interior hardware

Easy installation


- Installs in minutes with a screwdriver - no wiring needed
- Guaranteed to fit on standard doors

Finishes

BE and FE Series 605 608 609 613 618 619 620 622 625 626 716

BE365 Camelot	•	•	•	•	•	•	•	•	•	•
BE365 Plymouth	•	•	•	•	•	•	•	•	•	•
FE595 Camelot x Accent	•	•	•	•	•	•	•	•	•	•
FE595 Camelot x Georgian	•	•		•						
FE595 Plymouth x Flair	•	•	•	•	•	•	•	•	•	•
FE595 Plymouth x Plymouth	•									
FE575 Camelot x Accent	•	•	•	•	•	•	•	•	•	•
FE575 Plymouth x Flair	•	•	•	•	•	•	•	•	•	•
FE575 Plymouth x Elan									•	
FE575 Plymouth x Jazz									•	
FE575 Plymouth x Plymouth	•									

Door preparation





Keypad deadbolts



Keypad levers with Flex-lock



Keypad levers with Auto-lock

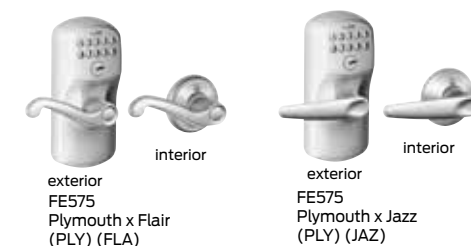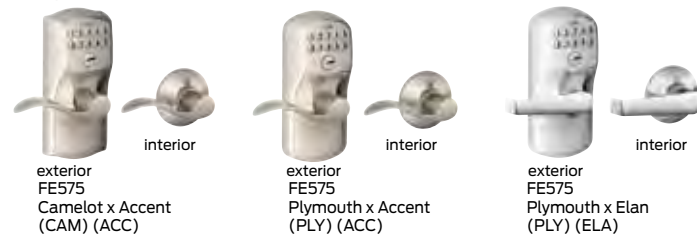



Electronic Specifications

BE479 Specifications

Certification	ANSI A156.36-2010 Grade 1
Product dimensions (w x h x d)	Exterior: 3" x 4-3/4" x 7/8" (76mm x 121mm x 22mm) Interior: 3" x 8-1/5" x 2-1/10" (76mm x 208mm x 54mm)
Weight	3.5 lbs. (1.6kg)
Warranty	Limited three-year electronics; limited lifetime mechanical and finish
Batteries required	Yes
Batteries included	Yes
Type of battery	AA
Number of batteries required	4
Battery life (hours)	8,760
Deadbolt throw	1" (25mm)
Key & cylinder	1 key, 5-pin C keyway
Door thickness range	1-3/8" to 1-3/4" (35mm to 44mm)
Cross bore diameter	2-1/8" (54mm) or 1-1/2" (38mm)
Edge bore diameter	1" (25mm)
Backset	Adjusts to 2-3/8" (60mm) or 2-3/4" (70mm)
Latch faceplate size	1" x 2-1/4" (25mm x 57mm)
Latch faceplate options	Round corner, square corner, and drive-in (triple option standard)
Strike	Round corner strike 1-1/8" x 2-3/4" (29mm x 70mm) with reinforcer
ADA compliant	No
Codes	2 pre-set unique four-digit user codes, storage of up to 30 user codes
Communications	Apple HomeKit™, Bluetooth® Smart technology
Homekit™ compatibility	HomeKit™ requires an iPhone®, iPad®, or iPod touch® with iOS 8.4 or later
Remote access	Controlling HomeKit-enabled accessories away from home requires an Apple TV® (3rd generation or later with Apple TV® software 7.0 or later and an iPhone®, iPad® or iPod touch® with iOS 8.4 or later)
Alarm	Built-in alarm to detect activity or forced entry with selectable sensitivity
Mobile app	Free mobile app available for iPhone®, iPad® and iPod touch®.
Operating temperatures	Outside lock body (exterior mounted): -35C to 66C Inside lock body (interior mounted): -10C to 50C

BE469NX Specifications

Certification	ANSI A156.36-2010 Grade 1
Warranty	3 year electronics, limited lifetime mechanical and finish
Backset	2 3/8" or 2 3/4"
Strike	1 1/8" x 2 3/4" round corners, strike reinforcer
Key & cylinder	1 key, 5-pin, C keyway
Door thickness	1 3/8" to 1 3/4"; thick door kit extends 1 7/8" to 2 1/2"
Product dimensions (w x h x d)	ext: 3" x 4 3/4" x 1" int: 3" x 8" x 2"
Communications	900 MHz (Z-Wave® RF)**
Operating temps	Ext: -35C to 66C Int: -10C to 49C
Battery	4 AA
Codes	Pre-set, unique 6-digit programming code, 2 pre-set unique 4-digit user codes, 30 user code capacity (4-8 digits)

** Z-Wave is a registered trademark of Zensys Inc, and/or its subsidiaries.

BE369NX Specifications

Certification	ANSI A156.36-2010 Grade 2
Warranty	3 year electronics, limited lifetime mechanical and finish
Backset	2 3/8" or 2 3/4"
Strike	1 1/8" x 2 3/4" round corners, strike reinforcer
Key & cylinder	2 keys, 5-pin, C keyway
Door thickness	1 3/8" to 1 3/4"
Product dimensions (w x h x d)	ext: 3 1/8" x 5 1/2" x 2 1/8" int: 3 1/4" x 7 1/2" x 2 1/4"
Communications	900 MHz (Z-Wave® RF)**
Operating temps	Ext: -30C to 66C Int: -10C to 49C
Battery	9V, 3AA
Codes	Pre-set, unique 6-digit programming code, 2 pre-set unique 4-digit user codes, 19 code capacity

** Z-Wave is a registered trademark of Zensys Inc, and/or its subsidiaries.

FE599NX Specifications

Certification	ANSI A156.2-2003 Grade 2
Warranty	3 year electronics, limited lifetime mechanical and finish
Backset	2 3/8" or 2 3/4"
Strike	1 5/8" x 2 1/4" radius corner, full lip, latch strike
Key & cylinder	2 keys, 5-pin, C keyway
Door thickness	1 3/8" to 1 3/4"
Product dimensions (w x h x d)	ext: 6 7/8" x 3" x 2 3/4" int: 3 1/4" x 8 1/4" x 2 3/4"
Communications	900 MHz (Z-Wave® RF)**
Operating temps	Ext: -30C to 66C Int: -10C to 49C
Battery	9V, 4AA
Codes	Pre-set, unique 6-digit programming code, 2 pre-set unique 4-digit user codes, 19 code capacity

** Z-Wave is a registered trademark of Zensys Inc, and/or its subsidiaries.

BE365 Specifications

Application	Residential single- and multi-family doors
Keying	5-pin tumbler with two keys per lock; stock locks are keyed 5-pin
Door range	1 3/8" to 1 3/4" thick (35mm - 44mm) standard; thick door kit available on BE365
Backset	Universal latches and deadbolts fit 2 3/8" (60 mm) or 2 3/4" (70 mm) backsets
Warranty	3 year electronics, limited lifetime mechanical and finish

FE575 & FE595 Specifications

Warranty	Limited lifetime mechanical and finish warranty, 3 year electronics warranty
Keypad lock latch	1" x 2 1/4" (25mm x 57mm) latch with radius corner faceplate, 7/8" (22mm) housing diameter, 1/2" (13mm) throw spring latch with square corner and circular drive-in faceplates
Keypad deadbolt latch	1" x 2 1/4" (25mm x 57mm) radius corner faceplate, 1" (25mm) housing diameter, requires 1" (25mm) edge bore, 1" (25mm) throw with square corner and circular drive-in faceplates
Latch strikes	1 5/8" x 2 1/4" (41mm x 57mm), square and radius corner, full lip
Deadbolt strike	2 3/4" (70mm), round corner, latch strike, metal strike reinforcer
Cylinder	5-pin solid brass, keyed 5-pin, C keyway, keyed different (KD)