

## AUDIT TRAIL ACCESS OPTIONS



**AL-IR1 Infrared Printer:**  
Prints the event log and user code with hand-held convenience.

**AL-DTMII Data Transfer Module:**  
Module used to transfer program data from the PC to the lock and receive Audit Trail from the lock. Can send program data for up to 96 locks.



**DL-WINDOWS SOFTWARE: Version 294 or higher**

Windows-format software used to create programming, manager users and schedules, receive Audit Trail from lock, program the lock using PC or laptop, program the AL-DTMII to program multiple locks and configure the AL-DTMII to transfer data. DL-WINDOWS is packed with AL-PCI2



**For Prox Models, AL-PRE:**  
Prox Card Reader/Enroller Enables instant, automatic enrollment of Prox Cards into DL-Windows (just tap the prox Card/fob device to the unit's faceplate to enroll!) Supports all Prox Cards and Prox Keyfobs. Simultaneous card enrollment, downloading or lock polling – all on just one serial port. (Replaces AL-PCI2.) 9V Battery operation.

## ORDERING INFORMATION

### EXIT TRIM ORDERING INFORMATION

<b>ETPDL-</b>		<b>1/</b>	<b>S/</b>	<b>26D</b>	<b>V99</b>
<b>TYPE:</b>		<b>Finish:</b>			
DL = Digital Only		26D = US26D Satin Chrome			
PDL = Digital with Prox		10B = Duronodic			
<b>DOOR THICKNESS:</b>		26 = US26 Polished Chrome			
1 = 1 3/4" Standard		3 = US3 Polished Brass			
2 = 2", Special Order		5 = US5 Antique Brass			
3 = 2 1/4", Special Order		<b>PANIC EXIT DEVICE BRANDS</b>			
4 = 2 1/2", Special Order		V99 = Von Duprin 99			
<b>HANDLE:</b>		C50 = Corbin ED5000 & Yale			
R = Regal		D93 = Dorma 9300			
S = Straight (ADA Compliant; Meets Titles 19 & 24, C.S.F.M.)		A38 = Arrow 3800			
		S88 = Sargent 8800			
For other Exit Devices call the factory.					

**IMPORTANT:** See separately ordered Cylinder Adapter Kits Pg.3  
**NOTE:** All ETPDL & ETDL Series Models are dependably Weather-Resistant.



**ALARM LOCK SYSTEMS, Inc.** • A Division of the NAPCO Security Group  
3ayview Avenue • Amityville, NY • 11701 • USA  
)-ALA-LOCK • 631-789-4871 • Fax: 631-789-3383 • www.alarmlock.com

ALARM LOCK

Sweets File# 08710/ALA Buy Line 3425


Trilogy® is a registered trademark of Alarm Lock. ©Alarm Lock, 2002 Specifications subject to change. Patents Pending  
All other brands trademarks are of their respective companies.

ALA169

*Add Proven Trilogy Convenience,  
Programming, Flexibility  
and Audit Trail To Most Manufacturers'  
Panic Exit Devices*



EXTERIOR DOOR

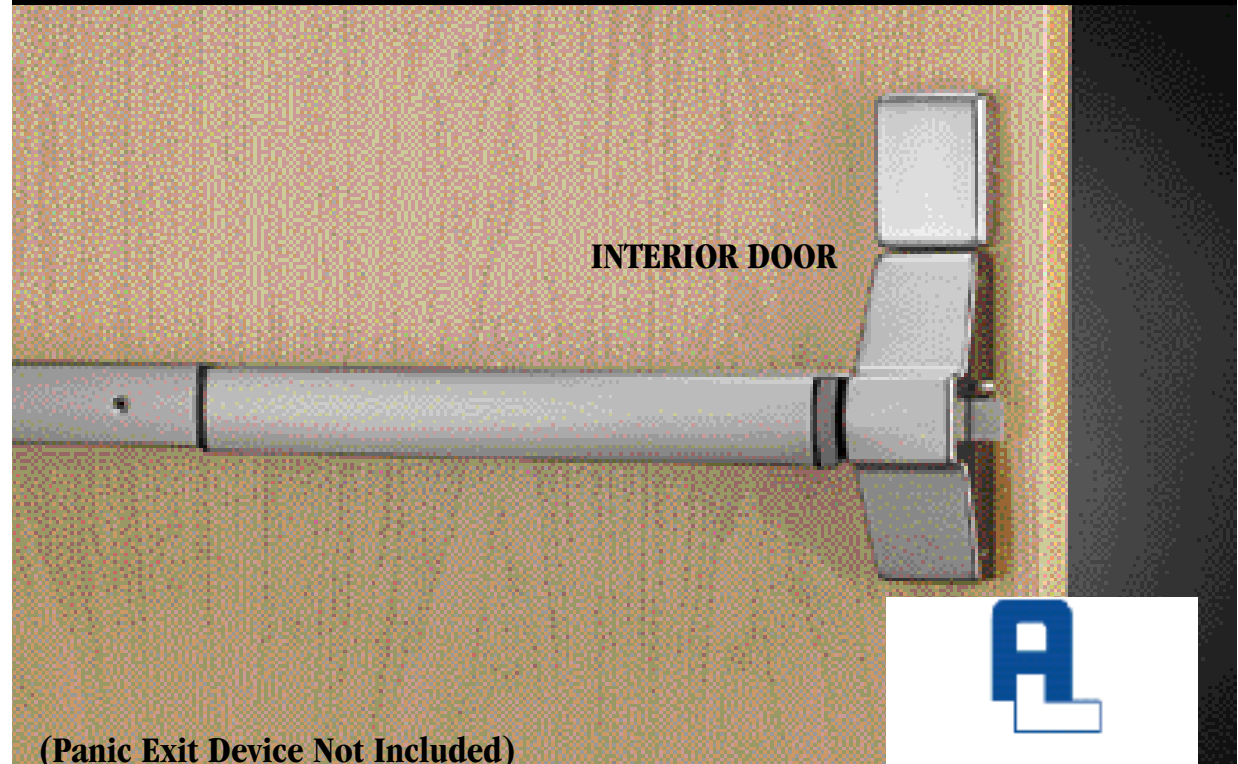

INTERIOR DOOR

(Panic Exit Device Not Included)



Add Trilogy Convenience, Programming, Flexibility & Audit Trail To Most Manufacturers' Exit Devices  
Trilogy® Exit & Trilogy Exit with Prox by Alarm Lock

Trilogy® Exit & Trilogy Exit with Prox by Alarm Lock  
Digital Keypad and/or Prox Reader Models Compatible With Most Manufacturers' Exit Devices

## TRIOLOGY EXIT FEATURES

- Field-proven clutch Mechanism ensures long life and durability
- Fingertip and/or Windows Programmable
- 2000 User Codes: Master, manager, supervisor and users
- Real Time Clock for up to 40,000 Event Time/Date-Stamped Audit Trail
- Up to 500 Lock/Unlock Schedules (with Time Zone Support)
- Rugged 12-Button Weather-Resistant Metal Keypad
- Non-Handed; Fully Field Reversible
- Adaptable to most major manufacturers of standard RIM and IC RIM Cylinders (See separately ordered Cylinder Adapter Kit, pg.3)
- Battery operated; uses 5 AA batteries
- Battery pack mounts to interior door. Located over or under panic bar (position dependent upon exit device manufacturer).



## TRIOLOGY EXIT WITH PROX

- Accepts most HID Proximity cards and keyfobs
- Users are individually programmed to use a card only, code only, or for the highest security – both card and code
- 2000 User Codes: Master, manager, supervisor and users
- Real Time Clock for up to 40,000 Event Time/Date-Stamped Audit Trail
- Up to 500 Lock/Unlock Schedules (with Time Zone Support)
- Prox Card data can be added to software by uploading from lock, by using AL-PRE or entering directly from computer using DL-Windows software.
- Field-proven clutch Mechanism ensures long life and durability
- Fingertip and/or Windows Programmable
- Rugged 12-Button Weather-Resistant Metal Keypad
- Non-Handed; Fully Field Reversible
- Adaptable to most major manufacturers of standard RIM and IC RIM Cylinders (See separately ordered Cylinder Adapter Kit, pg.3)
- Battery operated; uses 5 AA batteries
- Battery pack mounts to interior door. Located over or under panic bar (position dependent upon exit device manufacturer).



## SPECIFICATIONS

**Operation:** Clutch mechanism permits turning lever without retracting latch and reduces stress on the spindle. Entering access code, presenting prox card or key bypass, or remote bypass will allow lever to retract latch. Inside panic bar always provides instant egress. (Temperature Range: +150°F to -20° E)

**Door Thickness:** 1<sup>3</sup>/<sub>4</sub>" standard. Other thickness please see ordering information and/or consult factory.

**Keypad:** Vandal-resistant all metal, weather-resistant 12-button programmable for multi-level access functions including group or individual user codes, master and management codes, passage and emergency or service code, lockout and remote override capability and allowable entry time for 5 to 15 seconds. (Completely encapsulated circuit board hermetically sealed from weather and elements.)

**Audit Trail:** Locks' entry activity log can be polled to the Data Transfer Module (AL-DTMII), any PC using Alarm Lock's DL-WINDOWS Software (Vsn.2.94 or higher), and/or can be on-site printed using the hand-held infrared printer (AL-IR1).

**Interchangeable Core Models:** Accepts 6 & 7 Pin Cylinders from: Best, Arrow, KSP, Medeco, Keymark & KabaPeaks. Also available IC Core models for Yale, Medeco, Sargent, Corbin/Ruswin CL and Schlage. Alarm lock tailpiece is supplied; IC Core is not included.

**Cylinder:** Requires separately available Cylinder Adapter Kit, see below.

**Handing:** Non-handed, field reversible

**Compliances:** Use of the Alarm Lock TrilogyExit does not alter or invalidate the UL Safety or Fire Ratings of the Panic Exit Device you are using (when properly installed per Alarm Lock's instruction sheet).

**Finishes:** US3 polished brass, US26D satin chrome, US26 polished chrome, 10B Duronodic, US5 Antique Brass.

**Power:** 5 AA alkaline batteries, (supplied) installed in Battery Pack (see below). Audible low battery alert, visual and audible entry indicators

### EXIT TRIM MANUFACTURERS

The Trilogy Exit will work with the following Panic Bars:

- Von Duprin 99 Series
- Corbin ED5000 Series
- Yale 7100 Series
- Dorma 9300 Series
- Arrow 3800 Series
- Sargent 8800 Series

### CYLINDER ADAPTER KITS

Select a Cylinder Adapter Kit when ordering:

- Arrow 6 & 7 Pin IC Kit = ETARIC KIT
- Arrow Rim Kit = ETAR KIT
- Assa Rim Kit = ETAS KIT
- Alarm Lock Rim Kit = ETAL KIT
- Best 6 & 7 Pin IC Kit = ETBIC KIT
- Corbin IC Kit = ETCIC KIT
- Corbin Rim Kit = ETC KIT
- Medeco 6 & 7 Pin IC Kit = ETMIC KIT
- Medeco Rim Kit = ETM KIT
- Sargent IC Kit = ETRIC KIT
- Sargent Rim Kit = ETR KIT
- Schlage IC Kit = ETSIS KIT
- Schlage Rim Kit = ETS KIT
- Yale 6 & 7 Pin IC Kit = ETYIC KIT
- Yale Rim Kit = ETY KIT



**BATTERY PACK**  
(Positioned above or below panic exit trim, depending upon brand.)

*TrilogyExit with Von Duprin Panic Exit Device shown in profile on 1<sup>3</sup>/<sub>4</sub>" thick door.*