

Trilogy T3: Choice of audit trail pushbutton locks

T3 advanced digital lock with audit trail

DL3200 Series

High Capacity Audit Trail Lock

Enhanced version of the original DL3000

- 2000 user codes (3-6 digits)
- Multilevel security - Master; manager; supervisor; basic users
- Program at keypad or with PC-and/or data-transfer module
- 40,000 event audit trail logs with time-/date-stamp of access by user; create PC reports or at hand-held wireless printer
- 500 scheduled lock/unlock events
- Quick passage mode (without being in program mode)
- Weatherproof -31° to +151°F (-35° to +66°C)
- 5AA Battery operated; 80,000 cycles, typical

DL3000

Original Audit Trail Trilogy, similar to above

- 300 multilevel user codes; 1600 event log
- 150 scheduled lock/unlock events
- For outdoors, specify **WP** weatherproof models -31° to +151°F (-35° to +66°C)



Add Remote-Release convenience to any cylindrical Trilogy installation with keyfobs or desk-mounted button

- Easy & Cost Effective
- Retrofits Cylindrical Trilogy Locks dating all the way back to 2000 (with a serviceable battery pack) :RR-TrilogyKit
- For Network Locks, too! Just purchase either the keyfob (shown above left) or desk-mount release button (pg 8)




Ideal for receptionists.

Trilogy economical audit trail lock

DL2800

Cylindrical Lock

- 1000 event audit trail log, time-stamped by day, date, time and user
- 150 scheduled automatic lock/unlock events, etc.
- 200 user codes: Master, manager, supervisor and basic users. Also one-time service code (3-6 digits)
- Weatherproof -31° to +151°F (-35° to +66°C)
- 5AA Battery operated; 80,000 cycles, typical

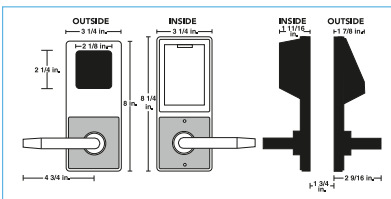

Trilogy cylindrical locks retrofit standard knobsets simply, in about an hour



Turn Standalone Trilogy Locks into Wireless Networked Networkx Locks with Field Upgrade Kits for Standalone PIN or PIN/Prox Cylindrical or Mortise Models. Call for more or go to <http://www.alarmlock.com/networkupgradekits.html>

Trilogy Ordering Information

Choice of three standard Trilogy finishes



US3
Polished Brass



US26D
Satin Chrome



US10B
Duronodic

U.S. Handing options



00 Straight Lever



75 Regal Curved Lever



25 Turnpiece
50 Knob available on
DL1250/1350

DL-WINDOWS Trilogy Software

Free Alarm Lock Trilogy Microsoft Windows-based software application, for programming, entering users, receiving audit trail from lock or used with ALDTMs to transfer data. Version 4.177 or higher, supports Trilogy Network, Wireless Keypads, Locks and ArchiTech series, and Trilogy standalone locks, with single database. Downloadable free at www.alarmlock.com. For enterprise network software options, and real-time performance, see pg.15



Trilogy audit trail and programming

AL-IR1 Infrared Printer

Prints the event log and user code with hand-held convenience.



AL-DTMIII Data Transfer Module

Module used to transfer program data from the PC to the lock and receive Audit Trail from the lock. Can transfer program data for up to 200 locks.



AL-PRE2 Dual Function Reader/Enroller for Smart Cards or Prox IDs

Just tap the Smart Card or Prox ID device to the unit's faceplate to automatically enroll in DL-WINDOWS software database. (9V battery operation.)



AL-PCI2U Lock / PC Interface (shown)


Interface cable interconnects lock and PC for data transfer with USB interface cable. (AL-PCI also includes DL-WINDOWS CD). Also available AL-PCI2 w/o USB.



Remote Release Kit

RR-TRILOGYKIT

Remote release kit for all Trilogy Cylindrical models includes the **RR-1BUTTON** for desk mount applications and **RR-RECEIVER** for installation inside the battery compartment of any cylindrical Trilogy lock (Simply connects to the 2 white remote release wires inside. Retrofits any existing cylindrical Trilogy manufactured since 1994.



Also available for Mortise and Exit Trim models, **RR-MORTISEKIT** and **RR-EXITTRIMKIT**, respectively. (Note: individual kit components, in blue, are also separately available.)

Cylindrical Trilogys

DL 27 00 WP IC /26D -Y

Model/Series:

DL27 = DL2700 Series
DL28 = DL2800 Series
DL30 = DL3000 Series
DL32 = DL3200 Series
DL52 = DL5300 Series
PDL30 = PDL3000 Series
PDL53 = PDL5300 Series

Networkx Wireless:

DL6100 PIN Series;
PDL6100, 8200 PIN/Prox

Trim:

00 = Lever
75 = Regal Curved Lever

Exterior/Interior Use:

For Exterior use of DL2700 & DL3000 only, order WP for weatherproof use. All other models are weatherproof as standard.

Cylinder:

IC = Standard Interchangeable Core Prep for Best, Falcon, Arrow, KSP
(Note: No "IC" indicates standard K.O. cylinder.)

Finish:

/3 = US3 Polished Brass
/26D = US26D Satin Chrome
/10B = Duronodic (Special Order)

Special Order IC Prep:

-Y = Yale
-M = Medeco
-R = Sargent
-C = Corbin/Ruswin
-S = Schlage

Mortise Trilogys

DL 35 00 DB R /26D EX

Model & Series:

DL35 = Trilogy T3 Mortise Series

Networkx Wireless:

DL6500 PIN; PDL6500 PIN/Prox

Trim:

00 = Standard Lever
75 = Regal Curved Lever (U.S. Option Only)

Lock Body:

DB = Dead Bolt
CR = Class Room (U.S. Only)

Handing:

Your Door -	Order -
Left Handed	L
Right Handed	R
Left Hand Reverse Bevel	R
Right Hand Reverse Bevel	L

Finish:

/3 = US3 Polished Brass
/26D = US26D Satin Chrome
/10B = Duronodic (Special Order)

European Model Suffix

Not Used For U.S. Models
*Note: Standard Lever for U.S. Models is Straight Lever.
Standard Lever for European Models is Curved Tubular Lever

(Note: Trim is non-handed. Lock body is field reversible.)

Trilogy Narrow Stile

DL1200/26D1

Model Type

PDL - Prox/PIN
DL - Digital PIN

Trilogy Series

12 - 2700 Series
13 - 3000 Series

Trim

00 = Lever
25 = Turnpiece
50 = Knob
75 = Regal lever

Finish

/26D Satin Chrome
/10B Duronodic
/MS Metallic Silver
/MB Metallic Bronze

Mechanical Dead Latch

1 - Supports Adams Rite:
4710, 4730, 4900 Series
2 - Supports Adams Rite:
4070, MS1850S,
MS1850S-050, MS1950,
MS1950-050
3 - KIT Includes Adams Rite
4900 with 1-1/8" backset,
628 & 313 faceplate
4 - KIT Includes Adams Rite
4900 with 1-1/2" backset,
628 & 313 faceplate

Trilogy Exit

ETPDL- 1 R/ 26D V99

Type:

PDL = Digital with Prox
PL = Prox Only
DL = No Prox

N = (suffix) Networkx Wireless

Door Thickness:

1 = 1 3/4" + 1/8"
2 = 2" to 2 3/4"
3 = 3" to 4"

Handle:

R = Regal
S = Straight

Finish:

/3 = US3 Polished Brass
/26D = US26D Satin Chrome
/10B = Duronodic (Special Order)

OEM Trim

V99 = Von Duprin 99
C50 = Corbin ED5000 & Yale
D93 = Dorma 9300
A38 = Arrow 3800
S88 = Old Style Sargent
N58 = New Style Sargent
P11 = Precision 1100
CR8 = Cal Royal 9800

Trilogy, Networx & ArchiTech: Standalone & Wireless

Model & Feature	DL2700	DL2700LD	DL2800	DL3000	PDL3000	DL3200	DL3500	PDL3500	DL4100	PDL4100	DL4500	PDL4500	DL5200	DL5300	PDL5300	DL6100	DL6500
Lock Type	Cylindrical	Cylindrical	Cylindrical	Cylindrical	Cylindrical Prox	Cylindrical	Mortise	Mortise Prox	Cylindrical	Cylindrical Prox	Mortise	Mortise Prox	Cylindrical	Cylindrical	Cylindrical Prox	Cylindrical Ethernet	Mortise Ethernet
Users	100	100	200	300	2000	2000	300	2000	2000	2000	2000	2000	100	2000	2000	5000	5000
Code Length	3-6 digits	3-6 digits	3-6 digits	3-6 digits	3-6 digits	3-6 digits	3-6 digits	3-6 digits	3-6 digits	3-6 digits	3-6 digits	3-6 digits	3-6 digits	3-6 digits	3-6 digits	3-6 digits	3-6 digits
Programming	Keypad only	Keypad only	Keypad /PC	Keypad /PC	Keypad /PC	Keypad /PC	Keypad /PC	Keypad /PC	Keypad /PC	Keypad /PC	Keypad /PC	Keypad /PC	Keypad only	Keypad /PC	Keypad /PC	Keypad /PC	Keypad /PC
Vandal-Proof Keypad	All metal, 12 button	All metal, 12 button	All metal, 12 button	All metal, 12 button	All metal, 12 button	All metal, 12 button	All metal, 12 button	All metal, 12 button	All metal, 12 button	All metal, 12 button	All metal, 12 button	All metal, 12 button	Dual sides, All metal, 12 button	Dual sides, All metal, 12 button	Dual sides, All metal, 12 button	All metal, 12 button	All metal, 12 button
Trim w/Rugged Clutch	Straight or curved lever	Straight or curved lever	Straight or curved lever	Straight or curved lever	Straight or curved lever	Straight or curved lever	Straight or curved lever	Straight or curved lever	Straight or curved lever	Straight or curved lever	Straight or curved lever	Straight or curved lever	Straight or curved lever	Straight or curved lever	Straight or curved lever	Straight or curved lever	Straight or curved lever
Audit Trail Events			1000	1600	40000	40000	40000	40000	40000	40000	40000	40000		40000	40000	35000	35000
Scheduled Events			150	150	500	500	500	500	500	500	500	500		500	500	500	500
Reader/Credential-Support					Prox HID			Prox HID		Prox HID		Prox HID			Prox HID	PDL6100 for HID Prox	
iLock® App Mobile Solution																	
Lockdown or Privacy		Lockdown w/ Keyfob in cludd							Privacy/ Lock-out	Privacy/ Lock-out	Privacy/ Lock-out	Privacy/ Lock-out				Global lockdown	Global lockdown
Function		Lockdown Indicator light bar (inner door)					CR Classroom or DB Deadbolt	CR Classroom or DB Deadbolt			DB Deadbolt	DB Deadbolt					
Weather-Proof -31 To 151° F	WP version	Standard	Standard	WP version	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard
Handing	Nonhanded	Nonhanded	Nonhanded	Nonhanded	Nonhanded	Nonhanded	Handed; Field Reversible	Handed; Field Reversible	Nonhanded	Nonhanded	Handed;	Handed;	Nonhanded	Nonhanded	Nonhanded	Nonhanded	Handed; Field Reversible
Door Thickness	1-5/8 to 1-7/8" (others on request.)	1-5/8 to 1-7/8" (others on request.)	1-5/8 to 1-7/8" (others on request.)	1-5/8 to 1-7/8" (others on request.)	1-5/8 to 1-7/8" (others on request.)	1-5/8 to 1-7/8" (others on request.)	1-5/8 to 1-7/8"	1-5/8 to 1-7/8"	1-5/8 to 1-7/8" (others on request.)	1-5/8 to 1-7/8" (others on request.)	1-5/8 to 1-7/8"	1-5/8 to 1-7/8"	1-5/8 to 1-7/8" (others on request.)	1-5/8 to 1-7/8" (others on request.)	1-5/8 to 1-7/8" (others on request.)	1-5/8 to 1-7/8" others upon request	1-5/8 to 1-7/8"
Backset	2-3/4" (included); 2-3/8" option.	2-3/4" (included); 2-3/8" option.	2-3/4" (included); 2-3/8" option.	2-3/4" (included); 2-3/8" option.	2-3/4" (included); 2-3/8" option.	2-3/4" (included); 2-3/8" option.	2-3/4" (included)	2-3/4" (included)	2-3/4" (included); 2-3/8" option.	2-3/4" (included); 2-3/8" option.	2-3/4" (included)	2-3/4" (included)	2-3/4" (included); 2-3/8" option.	2-3/4" (included); 2-3/8" option.	2-3/4" (included); 2-3/8" option.	2-3/4" (included); 2-3/8" opt.	2-3/4" (included)
Cylinder	Large key-in-knob, incld -or- IC Prep for Best/Falcon/ Arrow (w/o cyl.)	Large key-in-knob, incld -or- IC Prep for Best/Falcon/ Arrow (w/o cyl.)	Large key-in-knob, incld -or- IC Prep for Best/Falcon/ Arrow (w/o cyl.)	Large key-in-knob, incld -or- IC Prep for Best/Falcon/ Arrow (w/o cyl.)	Large key-in-knob, incld -or- IC Prep for Best/Falcon/ Arrow (w/o cyl.)	Large key-in-knob, incld -or- IC Prep for Best/Falcon/ Arrow (w/o cyl.)	Generic mortise cylinder, supplied.	Generic mortise cylinder, supplied.	Large key-in-knob, incld -or- IC Prep for Best/Falcon/ Arrow (w/o cyl.)	Large key-in-knob, incld -or- IC Prep for Best/Falcon/ Arrow (w/o cyl.)	Generic mortise cylinder, supplied.	Generic mortise cylinder, supplied.	Large key-in-knob, incld -or- IC Prep for Best/Falcon/ Arrow (w/o cyl.) One cyl. needed for each side of door	Large key-in-knob, incld -or- IC Prep for Best/Falcon/ Arrow (w/o cyl.) One cyl. needed for each side of door	Large key-in-knob, incld -or- IC Prep for Best/Falcon/ Arrow (w/o cyl.) One needed for each side of door	Large key-in-knob, incld -or- IC Prep for Best/Falcon/ Arrow (w/o cyl.)	Generic mortise cylinder, supplied.
Special Order Cylinders	Yale, Medeco, Sargent, Corbin/ Russwin, Schlage	Yale, Medeco, Sargent, Corbin/ Russwin, Schlage	Yale, Medeco, Sargent, Corbin/ Russwin, Schlage	Yale, Medeco, Sargent, Corbin/ Russwin, Schlage	Yale, Medeco, Sargent, Corbin/ Russwin, Schlage	Yale, Medeco, Sargent, Corbin/ Russwin, Schlage			Yale, Medeco, Sargent, Corbin/ Russwin, Schlage	Yale, Medeco, Sargent, Corbin/ Russwin, Schlage			Yale, Medeco, Sargent, Corbin/ Russwin, Schlage	Yale, Medeco, Sargent, Corbin/ Russwin, Schlage	Yale, Medeco, Sargent, Corbin/ Russwin, Schlage	Yale, Medeco, Sargent, Corbin/ Russwin, Schlage	Yale, Medeco, Sargent, Corbin/ Russwin, Schlage
Relay Options	yes	yes		yes	yes	yes	yes	yes	yes	yes	yes	yes	no	no	no	yes	yes
Battery/Cycles Typical	SAA; 200000 or up to 5 years	SAA; 100000 or up to 3 - 4 years	SAA; 100000	SAA; 100000	SAA; 60000	SAA; 100000	SAA; 100000	SAA; 60000	SAA; 100000	SAA; 60000	SAA; 60000	SAA; 60000	SAA; 80,000	SAA; 100000	SAA; 60000	4 C cells 5 years 500,000	4 C cells 5 years 500,000
Ratings	BHMA Grade 1 Lockset; 3hr. Fire Rated UL	BHMA Grade 1 Lockset; 3hr. Fire Rated UL	BHMA Grade 1 Lockset; 3hr. Fire Rated UL	BHMA Grade 1 Lockset; 3hr. Fire Rated UL	BHMA Grade 1 Lockset; 3hr. Fire Rated UL	BHMA Grade 1 Lockset; 3hr. Fire Rated UL	3 Hr Fire Rated UL	3 Hr Fire Rated UL	BHMA Grade 1 Lockset; 3hr. Fire Rated UL	BHMA Grade 1 Lockset; 3hr. Fire Rated UL	3 Hr Fire Rated UL	3 Hr Fire Rated UL	BHMA Grade 1 Lockset; 3hr. Fire Rated UL	BHMA Grade 1 Lockset; 3hr. Fire Rated UL	BHMA Grade 1 Lockset; 3hr. Fire Rated UL	BHMA Grade 1 Lockset; 3hr. Fire Rated UL	3 Hr Fire Rated UL
Architectural Finishes	US26D, US3, 10B	US26D, US3, 10B	US26D, US3, 10B	US26D, US3, 10B	US26D, US3, 10B	US26D, US3, 10B	US26D, US3, 10B	US26D, US3, 10B	US26D, US3, 10B	US26D, US3, 10B	US26D, US3, 10B	US26D, US3, 10B	US26D, US3, 10B	US26D, US3, 10B	US26D, US3, 10B	US26D, 10B	US26D, 10B

LEGEND:

- Privacy -
- Class Lockdown -
- Narrow Stile -
- Networx Wireless -
- Double-Sided -
- Keypads -
- ArchiTech -

(Note: Also see ordering information charts pg. 11 and 20)