

ACCESSORIES

Wall Mount Arm

The LA-011-W is a single-axis arm with a minimum profile and tilt/swivel.

Supported Monitors: EV3237, EV2780, EV2750, EV2730Q, S2133



Dual Height Adjustable Stand

Mount two monitors in either portrait or landscape orientation. Height is adjustable in six stages and cable housing in the back of the stand contributes to a clutter-free desktop.

Supported Monitors: S2133, S1934, S1923, S1703, S1503



Stand Bracket

Attach a thin client or mini PC to the stand with this bracket.

Supported Monitors: EV2456, EV2451



Protection Panels

These panels protect against dust and scratches. They come in reversible glossy and non-glare sides.

Supported Monitors: All FlexScan EV Slim Series and S Series monitors



Screen Cleaner Kit

Keep your screen free from dust and fingerprints with this screen cleaner kit.

Includes pump spray and cloth.



Touch Panel Pointer

This dedicated touch pen is ideal for factory settings where the user is wearing gloves or with dense menus that are too small to touch with a finger.


Supported Monitors: T2381 W, T1781



UTILITY SOFTWARE

Power Management Software

EIZO EcoView NET power management software helps organizations take advantage of the ergonomic and energy-saving features of EIZO monitors by allowing a network administrator to adjust their brightness and power settings from a central location.

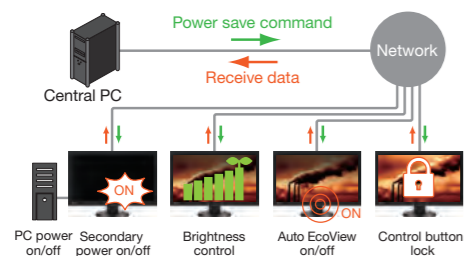


EIZO ScreenSlicer

With this software utility, windows can be easily aligned and dropped into the partitioned areas in single or multimonitor environments.



	FlexScan EV3237	FlexScan EV2780	FlexScan EV2750	FlexScan EV2456
Cabinet Color	Gray, Black	White, Black	White, Black	White, Black
Panel	Type: IPS Backlight: LED Size: 31.5" / 80 cm (799 mm diagonal) Native Resolution: DisplayPort: 3840 x 2160 (60Hz, 16:9 aspect ratio) DVI / HDMI: 3840 x 2160 (30Hz, 16:9 aspect ratio)	Type: IPS Backlight: LED Size: 27" / 68.5 cm Native Resolution: 2560 x 1440 (16:9 aspect ratio)	Type: IPS Backlight: LED Size: 27" / 68.5 cm Native Resolution: 2560 x 1440 (16:9 aspect ratio)	Type: IPS Backlight: LED Size: 24.1" / 61.1 cm (611 mm diagonal) Native Resolution: 1920 x 1200 (16:10 aspect ratio)
	Display Size (H x V): 696.9 x 392.0 mm Pixel Pitch: 0.181 x 0.181 mm Display Colors: 16.77 million Viewing Angles (H/V, typ.): 178°, 178° Brightness (typical): 300 cd/m ² Contrast Ratio (typical): 1000:1 Response Time (typical): 5 ms (gray-to-gray)	Display Size (H x V): 596.7 x 335.7 mm Pixel Pitch: 0.233 x 0.233 mm Display Colors: 16.77 million Viewing Angles (H/V, typ.): 178°, 178° Brightness (typical): 350 cd/m ² Contrast Ratio (typical): 1000:1 Response Time (typical): 5 ms (gray-to-gray)	Display Size (H x V): 596.7 x 335.7 mm Pixel Pitch: 0.233 x 0.233 mm Display Colors: 16.77 million Viewing Angles (H/V, typ.): 178°, 178° Brightness (typical): 350 cd/m ² Contrast Ratio (typical): 1000:1 Response Time (typical): 5 ms (gray-to-gray)	Display Size (H x V): 518.4 x 324.0 mm Pixel Pitch: 0.270 x 0.270 mm Display Colors: 16.77 million Viewing Angles (H/V, typ.): 178°, 178° Brightness (typical): 350 cd/m ² Contrast Ratio (typical): 1000:1 Response Time (typical): 5 ms (gray-to-gray)
Video Signals	Input Terminals: DisplayPort 1.2 x 2 (with HDCP 1.x ¹), DVI-D 24 pin x 1 (with HDCP 1.x ¹), HDMI x1 (with HDCP 1.x ¹)	Input Terminals: USB Type-C x 1 (with HDCP), DisplayPort x 1 (with HDCP), HDMI x1 (with HDCP)	Input Terminals: DisplayPort x 1, DVI-D 24 pin x 1 (with HDCP), HDMI x1 (with HDCP)	Input Terminals: D-Sub mini 15 pin x 1, DVI-D 24 pin x 1 (with HDCP), HDMI x 1 (with HDCP), DisplayPort x 1 (with HDCP)
	Digital (H, V): 31 - 134 kHz, 29 - 31 Hz and 59 - 61 Hz	Digital (H, V): USB Type-C: 31 - 89 kHz, 29 - 31 Hz, 59 - 61 Hz / DisplayPort: 31 - 89 kHz, 59 - 61 Hz HDMI: 31 - 89 kHz, 29 - 31 Hz, 49 - 51 Hz and 59 - 61 Hz	Digital (H, V): DVI: 31 - 89 kHz, 29 - 31 Hz and 59 - 61 Hz / DisplayPort: 31 - 89 kHz, 59 - 61 Hz HDMI: 31 - 89 kHz, 49 - 61 Hz	Digital (H, V): DVI: 31 - 76 kHz, 59 - 61 Hz / DisplayPort: 31 - 76 kHz, 59 - 61 Hz HDMI: 15 - 76 kHz, 49 - 51 Hz and 59 - 61 Hz
	Analog (H, V): - Sync Formats: -	Analog (H, V): - Sync Formats: -	Analog (H, V): - Sync Formats: -	Analog (H, V): 31 - 81 kHz, 55 - 76 Hz Sync Formats: Separate
USB	Function: 1 port for upstream 3-port USB hub (including 1 USB Battery charge port) Standard: USB 3.0, USB BC 1.2	Function: 1 port for upstream 2-port USB hub Standard: USB 3.1 Gen 1	Function: 1 port for upstream 2-port USB hub Standard: USB 3.0	Function: 1 port for monitor control 2-port USB hub Standard: USB 3.0
Audio	Speakers: 1.0 W +1.0 W Input Terminals: 3.5 mm stereo jack Output Terminals: 3.5 mm headphone jack	Speakers: 1.0 W +1.0 W Input Terminals: - Output Terminals: 3.5 mm headphone jack	Speakers: 1.0 W +1.0 W Input Terminals: 3.5 mm stereo jack Output Terminals: 3.5 mm headphone jack	Speakers: 1.0 W +1.0 W Input Terminals: 3.5 mm stereo jack Output Terminals: 3.5 mm headphone jack
Power	Power Requirements: AC 100 - 120 V / 200 - 240 V, 50 / 60 Hz Max. Power Consumption: 105 W Typ. Power Consumption: 30 W Power Save Mode: Less than 0.5 W Power Management: Power Save (VESA DPM, DisplayPort Rev. 1.1a, and DVI DMPM), Eco Timer	Power Requirements: AC 100 - 240 V, 50 / 60 Hz Max. Power Consumption: 96 W Typ. Power Consumption: 23 W Power Save Mode: Less than 0.5 W Power Management: Power Save (VESA DPM, DisplayPort Rev. 1.1a, and DVI DMPM), Eco Timer	Power Requirements: AC 100 - 240 V, 50 / 60 Hz Max. Power Consumption: 67 W Typ. Power Consumption: 22 W Power Save Mode: Less than 0.5 W Power Management: Power Save (VESA DPM, DisplayPort Rev. 1.1a, and DVI DMPM), Eco Timer	Power Requirements: AC 100 - 240 V, 50 / 60 Hz Max. Power Consumption: 44 W Typ. Power Consumption: 11 W Power Save Mode: Less than 0.5 W Power Management: Power Save (VESA DPM, DisplayPort Rev. 1.1a, and DVI DMPM)
Features & Functions	Preset Modes: Color mode (Paper, Movie, sRGB, User1, User2, DICOM) Auto EcoView: Yes EcoView Sense: Yes OSD Languages: English, French, German, Italian, Japanese, Simplified and Traditional Chinese, Spanish, Swedish	Preset Modes: Color mode (Paper, Movie, sRGB, User1, User2, DICOM) Auto EcoView: Yes EcoView Sense: - OSD Languages: English, French, German, Italian, Japanese, Simplified and Traditional Chinese, Spanish, Swedish	Preset Modes: Color mode (Paper, Movie, sRGB, User1, User2, DICOM) Auto EcoView: Yes EcoView Sense: - OSD Languages: English, French, German, Italian, Japanese, Simplified and Traditional Chinese, Spanish, Swedish	Preset Modes: Color mode (Paper, Movie, sRGB, User1, User2, DICOM) Auto EcoView: Yes EcoView Sense: - OSD Languages: English, French, German, Italian, Japanese, Simplified and Traditional Chinese, Spanish, Swedish
Physical Specifications	Dimensions (W x H x D): 731 x 439 - 578 x 245 mm Dimensions (Without Stand, W x H x D): 731 x 428 x 59.5 mm Net Weight: 10.6 kg Net Weight (Without Stand): 7.8 kg Height Adjustment Range: 139 mm Tilt: 35° Up, 5° Down Swivel: 344° Pivot: - Hole Spacing (VESA Std.): 100 x 100 mm	Dimensions (W x H x D): 611.6 x 390.2 - 545.2 x 245 mm Dimensions (Without Stand, W x H x D): 611.6 x 359 x 48.5 mm Net Weight: 8.1 kg Net Weight (Without Stand): 5.3 kg Height Adjustment Range: 155 mm Tilt: 35° Up, 5° Down Swivel: 344° Pivot: 90° (both clockwise and counter clockwise) Hole Spacing (VESA Std.): 100 x 100 mm	Dimensions (W x H x D): 611.6 x 390.2 - 545.2 x 245 mm Dimensions (Without Stand, W x H x D): 611.6 x 359 x 48.5 mm Net Weight: 7.9 kg Net Weight (Without Stand): 5.1 kg Height Adjustment Range: 155 mm Tilt: 35° Up, 5° Down Swivel: 344° Pivot: 90° (both clockwise and counter clockwise) Hole Spacing (VESA Std.): 100 x 100 mm	Dimensions (W x H x D): 531 x 351.4 - 510.1 x 190 mm Dimensions (Without Stand, W x H x D): 531 x 341.9 x 45.5 mm Net Weight: 5.7 kg Net Weight (Without Stand): 3.7 kg Height Adjustment Range: 158.6 mm Tilt: 35° Up, 5° Down Swivel: 344° Pivot: 90° (both clockwise and counter clockwise) Hole Spacing (VESA Std.): 100 x 100 mm
Certifications & Standards <small>(Please contact the EIZO group company or distributor in your country for the latest information.)</small>	TCO Displays 7, EPEAT Gold (US), TUV/Ergonomics, TUV/GS, RCM, CE, CB, cTUVus, FCC-B, Canadian ICES-003-B, TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, EAC	TCO Displays 7, EPEAT Gold (US), TUV/Ergonomics, TUV/GS, RCM, CE, CB, cTUVus, FCC-B, Canadian ICES-003-B, TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, EAC	TCO Displays 7, EPEAT Gold (US), TUV/Ergonomics, TUV/GS, RCM, CE, CB, cTUVus, FCC-B, Canadian ICES-003-B, TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, EAC	TCO Displays 7, EPEAT Gold (US), TUV/Ergonomics, TUV/GS, RCM, CE, CB, cTUVus, FCC-B, Canadian ICES-003-B, TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, EAC
Supplied Accessories <small>(May vary by country. Please contact EIZO for details.)</small>	AC power cord, signal cables (DisplayPort - DisplayPort), USB cable, EIZO LCD Utility Disk (PDF user's manual), setup guide	AC power cord, signal cable (USB Type-C - USB Type-C), CD-ROM (PDF user's manual), setup guide	AC power cord, signal cables (DisplayPort - DisplayPort), USB cable, EIZO LCD Utility Disk (PDF user's manual), setup guide	AC power cord, signal cable (DisplayPort - DisplayPort), USB cable, cable cover, CD-ROM (PDF user's manual), setup guide
Warranty	Five Years	Five Years	Five Years	Five Years
Zero Bright Pixels²	Yes	Yes	Yes	Yes

Dimension Diagrams (Unit:mm)

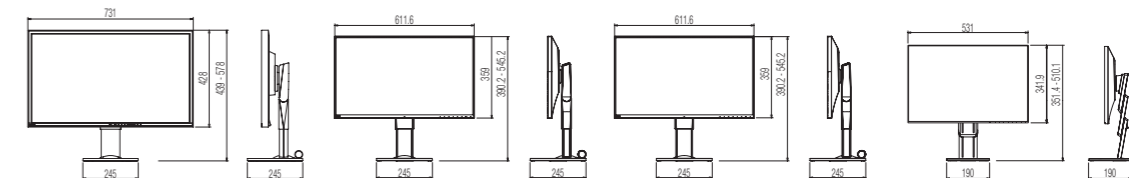

¹ With current LCD technology, a panel may contain a limited number of missing or flickering pixels. If the monitor is left on continuously over a long period of time, dark smudges or burn-in may appear. To maximize the life of the monitor, we recommend the monitor be turned off periodically.
² 6 months from the date of purchase.