

# **AO19 SERIES®**

## **AO19 Activation Accessories**

### **Hand-Held Wireless Transmitter**

---

The 104737 Wireless Transmitter provides the most reliable wireless activation of automatic doors available.



### **Benefits**

---

- The hand-held micro-transmitters are small enough to wear as a necklace, yet have large, easy to activate buttons.
- The transmitter can also be used interchangeably with other Manufacturer's products that operate on its frequencies as well.

### **Features**

---

- Utilizes Proprietary High Definition Radio Control™ (HDRC™) for unsurpassed signal transmission clarity
- Three user selectable frequencies available in single unit: HDRC™, 300 MHz, 390 MHz.
- FCC license for all three frequencies.
- SignalLock™ guarantees signal transmission when push plate is pressed.
- Power saving circuitry extends battery life.
- Integrated signal radiating antenna boosts signal strength.
- One 104737-1 (CP/TX-HH1) and Two 104737-2 (CP/TX-HH2) buttons available.
- Compact overall size with large activation buttons.
- The 104737 CP/TX can transmit three different frequencies.

### **Electrical Options**

---

- 104737-1 Hand-held Transmitter - 1 button
- 104737-2 Hand-held Transmitter - 2 button

### **Accessories**


---

- 104752 Multi-mode Receiver
- 104752-RXM Multi-Mode Receiver

## Technical Information

- Temperature Range: -4°F to 140°F (-20°C to 60°C)
- 390 MHz: Compatible with MS SEDCO and GENIE™ products
- Physical Size 2"W x 3/4"D x 2 3/4"H
- 300 MHz: Compatible with Multicode™ products

## Dimensions

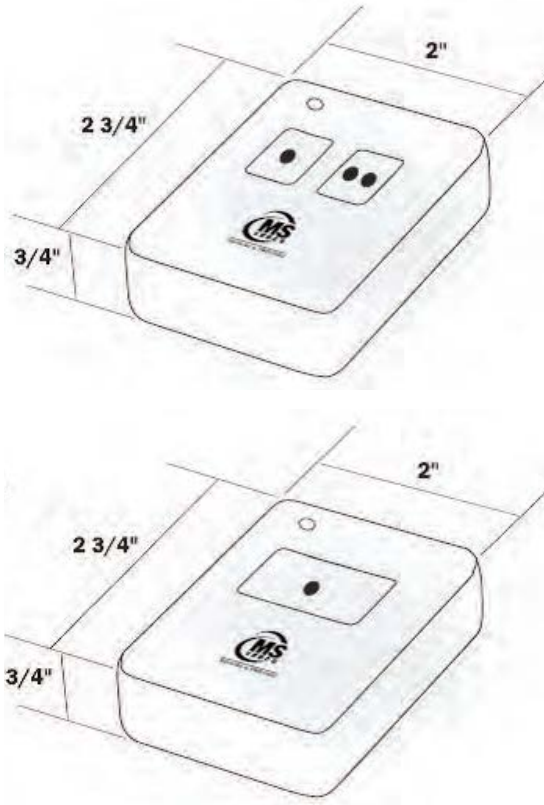

## Listings and Approvals



American National Standards Institute (ANSI)



Building Hardware Manufacturers Association (BHMA) - ANSI/BHMA A156.10 & A156.19

FCC

US Patent 7,545,833

## Warranty

1 Year Limited Manufacturer's Warranty

*Where Trust is Built™*

**DETEX®**

*Life Safety and Security Door Hardware*

Detex Corporation  
302 Detex Drive  
New Braunfels, Texas 78130-3045 USA  
PH. (830) 629-2900  
(800) 729-3839  
FAX (800) 653-3839  
<http://www.detex.com>  
USA Sales:  
[marketing@detex.com](mailto:marketing@detex.com)  
International Sales:  
[export@detex.com](mailto:export@detex.com)

# AO19 SERIES®

## AO19 Activation Accessories

### Transmitters

The 104753 Transmitter provides the most reliable wireless activation of automatic doors available.



104753 - 4" Box/Transmitter



104753-R4 - 4" Round Box/Transmitter  
104753-R6 - 6" Round Box/Transmitter



104753-J Jamb Mount Box/Transmitter

### Benefits

- The 104753 transmitter comes prewired and installed with battery in a surface mount box, making installation quick and easy.
- The 104753 can also be used interchangeably with other Manufacturer's products that operate on its frequencies as well.
- The 104753 can transmit three different frequencies.

### Features

- Utilizes Proprietary High Definition Radio Control™ (HDRC™) for unsurpassed signal transmission clarity.
- Three User selectable frequencies available in single unit: HDRC™, 300 MHz, and 390 MHz.
- FCC License for all three frequencies.
- SignalLock™ guarantees signal transmission when push plate switch is pressed.
- Power saving circuitry extends battery life.
- Radiating antenna boosts signal strength.
- Transmitter and battery factory prewired and installed in mounting boxes.
- Powered by standard 9V battery.
- Quick battery access.

### Electrical Options

- 104737-1 Handheld Transmitter - 1 button
- 104737-2 Handheld Transmitter - 2 buttons
- 104753-P Post Transmitter
- 104753-Vestibule Dual Transmitter
- 104753-STX 4" Square Sequencing Transmitter
- 104753-STX-P Sequencing Post Transmitter
- 104753-STX-R4 Round 4" Box/ Sequencing Transmitter
- 104753-STX-R6 Round 6" Box/ Sequencing Transmitter