

GV-APOE1611-V2 16-Port Gigabit Web Management PoE Switch





- 16-Port 10/100/1000BaseT(X) PoE+ with 2 SFP Uplink Ports and 2 Combo Uplink Ports
- IEEE 802.3at Compliant (16 Ports at Full 15.4 W)
- Web-based Configuration and Management
- VLAN, QoS, DSCP, RSTP, IGMP Snooping, Link Aggregation, LACP, Port Security, Bandwidth Control, Storm Control
- PD Alive Monitor
- ONVIF Discover
- PoE Schedule
- PoE connection for network cables up to 250 m (820 ft) at 10 Mbps transfer rate
- Max. 280 W power consumption
- 19" Rack-mount
- Up to 16 GV-IP Cameras support

Introduction

GV-APOE1611-V2 is a 16-Port 10/100/1000BaseT(X) PoE+ Web Smart PoE Switch with 2 SFP uplink ports and 2 Combo uplink ports. The switch supports IEEE 802.3at Power over Ethernet standard for a maximum power consumption of 280 W. While no special network cables are required for connecting to your powered devices (PD), such as IP cameras, GV-APOE1611-V2 also allows power supply over network cables of up to 250 m (820 ft) in length, at 10 Mbps.

Designed for medium or large network environment to strengthen its network connection and efficiency, the switch provides exceptionally smart Web management features, including VLAN, QoS, RSTP, IGMP Snooping, LACP, Port Security and more. In addition, GV-APOE1611-V2 gives you the option of installing it in a 19" cabinet with a rack-mount kit or underneath a desk.

Dimensions

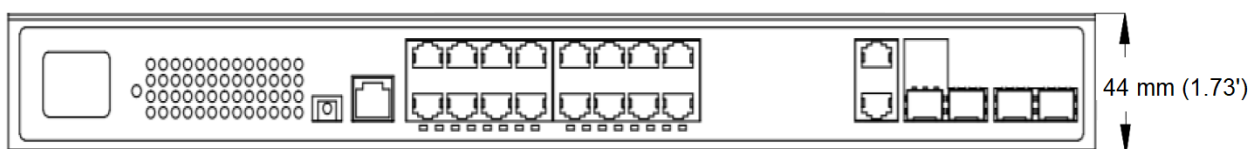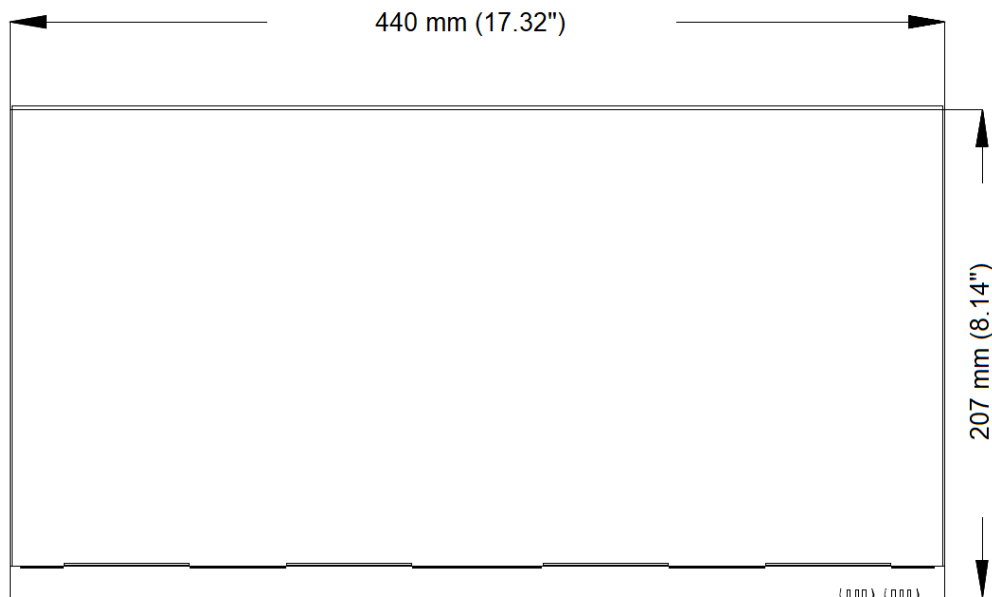

Specifications

Ethernet		
Layer Supported		L2
Ports		
Number of Ports		16-port 10/100/1000BaseT(X) with RJ-45 Connectors, PoE+ 2-port SFP Uplink Port 2-port Combo Uplink Port
Performance		
MAC Address		8 K, Auto-Learning, Auto-Aging
Buffer Memory		4.1 M bits
Transmission Method		Store and Forward
Transmission Media		10/100BaseT(X) Cat. 5 UTP/STP 1000BaseT Cat. 5e, 6 UTP/STP
Filtering/Forwarding Rates		29.76 Mpps
Backplane Capacity		40 Gbps
Smart Features		
VLAN		Management VLAN, Private VLAN, Voice VLAN, Surveillance-VLAN Q-in (Double Tag), 802.1v Protocol VLAN, MAC-Based VLAN
Network		IPv4 / IPv6, DHCP Client / DHCPv6 Client
IGMP Snooping		IGMP Snooping / Filter, MLD Snooping, MVR
Link Aggregation		Load Balance, LAG, LACP
Quality of Service (QoS)		QOS Apply: Port Based, 802.1p, CoS, DSCP, IP Precedence, TCP/UDP (IPv4/IPv6), QOS Scheduling: WRR, Strict Priority, DSCP & CS, IPv4 Qos (QCEs), IPv6 Qos (QCEs)
ARP		IP Source Guard, Dynamic ARP Inspection, DoS
DHCP		IP DHCP Snooping, Option82, 62, 67
STP		STP/ MSTP/RSTP. STP Root Guard, Bpdu Guard, Loop Detection
SNMP		SNMP Community, SNMP View, SNMP Trap, SNMP (V1, V2C, V3)
RMON		RMON (1, 2, 3, 9)
ACL		L2+/L3/L4, IPv6 Support, Management Access List
AAA		TACACS+, Radius
Discovery		LLDP, MED
ONVIF		ONVIF Detect, ONVIF Discover, ONVIF Server
PoE Configuration		PoE Port Configuration, PoE Delay, PD Alive Monitor, PoE Schedule
Diagnostics		IPv6 Ping, Traceroute, Cable Test, DDMI
Port Management		Basic config (speed, duplex, flow control), Statistics, Storm Control, Rate Limit, Port-Security, Port Mirror, Port Protected, EEE, Jumbo Frame
Administrator Management		Basic info, System Status, User Management, SNTP, Import/Export Config, Firmware Upgrade, System Reboot, Restore Factory
Syslog		Logging Management, Debug
Mechanical Characteristics		
LED Indicators		Per Port: Link/Act PoE Act/Status Power System
Electrical Characteristics		
PoE Power	Input	100 ~ 240 V/AC, 50 / 60 Hz
	Output	IEEE 802.3at Compliant Voltage, Per Port Max. 32 watts (16 Ports at Full 15.4 W / 8 Ports at Full 32 W)
PoE Mode		Mode A
Max. Power Consumption		280 W
POE Budget		250 W
General		
Dimensions (H x W x D)		44 x 440 x 207 mm (1.73" x 17.32" x 8.14")
Weight		2.56 kg (5.64 lb)
Operating Temperature		0°C ~ 40°C (32°F ~ 104°F)
Storage Temperature		-40°C ~ 70°C (-40°F ~ 158°F)
Humidity		10 to 90% RH (non-condensing)
Surge Protection		±6 kV

Standards and Regulatory



Standards	IEEE 802.3 10BaseT, IEEE 802.3u 100BaseTX, IEEE 802.ab 1000BaseT, IEEE 802.3z 1000BaseSX/LX IEEE 802.3x Full-duplex and Flow Control IEEE 802.3ad Link Aggregation Control Protocol IEEE 802.1Q VLAN IEEE 802.1p Class of Service IEEE 802.1D Spanning Tree Protocol IEEE 802.1w Rapid Spanning Tree Protocol IEEE 802.1s Multiple Spanning Tree Protocol IEEE 802.1X Port-based Network Access Control IEEE 802.3at Power Over Ethernet (PoE+)
Regulatory	CE, FCC Class A, RoHS compliant

Note:

1. The switch is a plug-and-play device and compatible with all SFP modules.
2. Specifications are subject to change without notice.



Accessories

Name	Details
GV-LC	 <p>The SFP transceiver complies with IEEE 802.3z 1000BaseSX Ethernet, and provides the media transmission distance up to 220 / 550 m.</p>
GV-LC10	 <p>The SFP transceiver complies with IEEE 802.3z 1000BaseLX Ethernet, and provides the media transmission distance up to 10 km.</p>

Packing List

1. GV-APOE1611-V2 x 1
2. Power Cord x 1
3. Screws x 8
4. Rack Mount Kit
5. Rubber Feet x 4