



V2765NVR

IR Vandal-Resistant Dome Camera




Features

- 1/3 inch Sony Super HAD CCD
- High Resolution : 530 TV Lines
- Built in DC Iris Vari-focal Lens (f=3.8~9.5mm)
- Auto White Balance
- Motion Detection
- Privacy Zone
- 24EA IR LED, 1EA Sensor
- Min. Illumination : Night (0.00 Lux, IR LED On)
- Extra Video Out Port for Installer
- 3-Axis Camera Construction
- Built-in Heater (Option), Camera Bracket (Option)
- Dual (Surface/Flush) Mount Type
- Diameter of Bubble : 100mm



DIMENSIONS

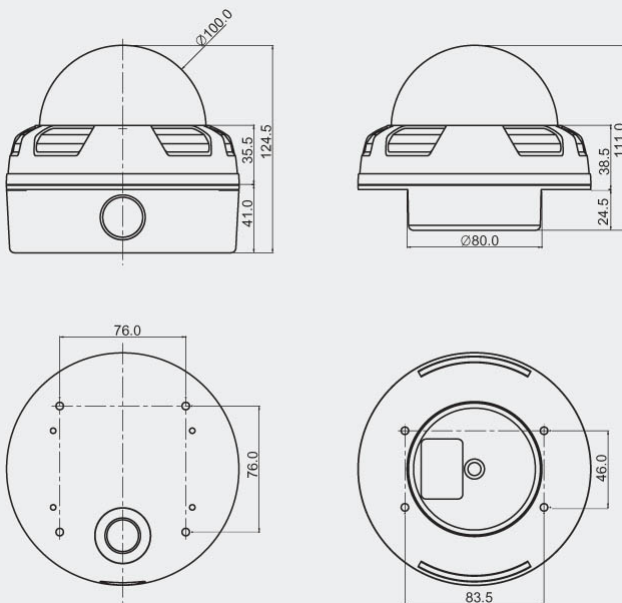

SPECIFICATIONS

| Model | V2765NVR |
|--------------------------|--|
| Signal System | NTSC |
| Scanning System | 2:1 Interlace |
| Scanning Frequency (H) | 15.734 KHz |
| Scanning Frequency (V) | 59.94 Hz |
| Image Sensor | 1/3 Inch SONY Super HAD CCD |
| Total Pixels | 811(H) x 508(V) 410K |
| Total / Effective Pixels | 768(H) x 494(V) 380K |
| Horizontal Resolution | 530 TV Lines |
| Video Output | 1.0V p-p (75Ω, Composite) |
| S/N Ratio | More than 50dB(AGC Off) |
| IR LED & Sensor | Built in 24EA IR LED (850nm, 30°) & 1EA Sensor |
| IR Visible Range | Max. 15m |
| Lens | DC Iris Vari-focal Lens (f=3.8~9.5mm) |
| Min. Illumination | Day (0.3 Lux), Night(0.00 Lux, IR LED On) |
| White Balance | Auto |
| AGC, BLC, Flickerless | On/Off (Dip Switch) |
| OSD | On/Off |
| Privacy Zone | On/Off(4 Programmable Zone) |
| Motion Detection | On/Off(64 Programmable Zone) |
| Shutter Speed | 1/60~1/100,000 Sec. |
| Supplied Voltage | 24VAC or 12VDC Dual Voltage |
| Dimensions(ØxH) | Surface : 100.0 x 124.5 mm Flush : 100.0 x 111.0 mm |
| Weight | Approx. 1210g |