


# UN-IPC6322LRX22PC


## 22X IR Network PTZ Camera

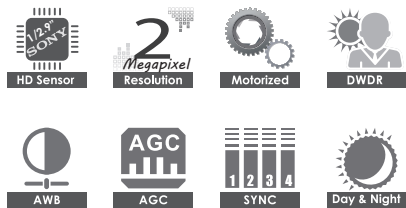

### Key Features

- 1/2.9" HD CMOS Sensor
- Up to 1920 × 1080 resolution, 30fps
- 22X Optical Zoom
- DWDR, Smart IR, Distance: 150m
- Alarm I/O, Audio I/O, ONVIF
- IP66

### Dimensions

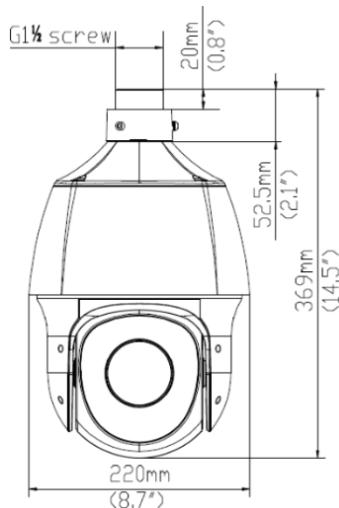

### Specifications

Model	UN-IPC6322LRX22PC				
<b>Camera</b>					
Sensor	1/2.9", 2.0 megapixel, progressive scan, CMOS				
Lens	5.2 ~ 114.4mm, AF automatic focusing and motorized zoom lens				
Digital Zoom	16				
Optical Zoom	22				
DORI Distance	Lens (mm)	Detect (m)	Observe (m)	Recognize (m)	Identify (m)
Angle of View (V)	5.2	83.6	33.4	16.7	8.4
Angle of View (O)	114.4	1838.6	735.4	367.7	183.9
Angle of View (H)	54.40° ~ 3.44°				
Angle of View (V)	39.2° ~ 1.9°				
Angle of View (O)	66.9° ~ 4.1°				
Shutter	Auto/Manual, shutter time: 1 ~ 1/100000s				
Minimum Illumination	Colour: 0.01Lux (F1.5, AGC ON)				
Iris	F1.5				
Day/Night	IR-cut filter with auto switch (ICR)				
Digital noise reduction	2D/3D DNR				
S/N	>55 dB				
IR Range	UP to 150m (492ft)				
Defog	Digital Defog				
WDR	DWDR				
<b>Video</b>					
Video Compression	Ultra 265, H.265, H.264, MJPEG				
H.264 code profile	Baseline profile, Main Profile, High Profile				
Frame Rate	Main Stream: 2MP (1920*1080), Max 30fps; Sub Stream: 2MP (1920*1080), Max 30fps; Third Stream: D1 (720*576), Max 30fps				
HLC / BLC / EIS	Supported				
OSD	Up to 8 OSDs				
Privacy Mask	Up to 24 areas				
ROI	Up to 8 areas				
Motion Detection	Up to 4 areas				
<b>Smart</b>					
Behavior Detection	Intrusion, cross line, motion detection				
Intrusion	Enter and loiter in a pre-defined virtual region				
cross line	Cross a pre-defined virtual line				
motion detection	Moving within a pre-defined virtual region				
Recognition	Face detection, Audio detection				
Statistical Analysis	People counting				
General Function	Watermark, IP Address Filtering, Tampering Alarm, Access Policy, ARP Protection, RTSP Authentication, User Authentication				
<b>Audio</b>					
Audio Compression	G.711				
Two-way Audio	Supported				
Suppression	Supported				
Sampling Rate	8KHZ				
<b>Storage</b>					
Edge Storage	Micro SD, up to 256GB				
Network Storage	ANR				
<b>Network</b>					
Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, SSL, QoS				
Compatible Integration	ONVIF (Profile S, Profile G, Profile T), API				
<b>Pan &amp; Tilt</b>					
Pan Range	360°				
Pan Speed	0.1°/s ~ 240°/s Preset speed: 300°/s				
Tilt Range	-15° ~ 90° (auto reverse)				
Tilt Speed	0.1° ~ 80°/s Preset speed: 80°/s				
Number of Presets	1024				
Patrol	Preset patrol, route patrol, recorded patrol				
Home Position	Supported				
<b>Interface</b>					
Audio I/O	1 Input: impedance 35kΩ; amplitude 2V [p-p] 1 Output: impedance 600Ω; amplitude 2V [p-p]				
Alarm I/O	1/1				
Network	1 RJ45 10M/100M Base-TX Ethernet				
<b>General</b>					
Power	DC 12V±10%, PoE (PSE Required) Power consumption: 16 ~ 30W				
Dimensions (Ø x H)	Φ215 × 344mm (Φ8.5" x 13.5")				
Weight	3kg (6.6lb)				
Working Environment	-40°C ~ 65°C (-40°F ~ 149°F), Humidity: ≤95% RH (non-condensing)				
Ingress Protection	IP66				
Reset Button	Supported				