



Sensor 1500TVL Min. illumination BLC WDR



Day&Night Auto WB Sync AGC Water-proof

4-In-1(TVI/AHD/CVI/CVBS)


5MP | 3.3-12 MM | TRUE WDR

Specifications

Features

- 5MP@20fps/4MP@30fps image, high resolution, true color
- AHD / TVI / CVI / CVBS standard and lossless video output
- Up to 1500 TVL resolution
- CMOS progressive scan, perfectly capture the moving object
- True WDR
- Support OSD menu
- High speed, long distance and real time transmission
- Auto color to B / W at low illumination
- Support ICR switch, true day / night
- Support noise reduction function
- 20 ~ 30m IR night view distance
- IP66 ingress protection
- Support COC

Dimensions

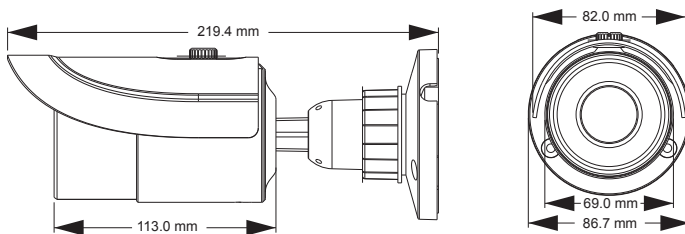

Accessories



Model	VTC-5SB31
Specifications	
Camera	
Image Sensor	1 / 2.5 "CMOS
Resolution	5MP / 4MP
Image Size	2592 x 1944
Video Output	AHD / TVI / CVI / CVBS
Image System	PAL / NTSC
Electronic Shutter	Auto; 1 / 25s ~ 1 / 100000s (PAL); 1 / 30s ~ 1 / 100000s (NTSC)
IR Distance	20 ~ 30 m
Frame Rate	5MP@20fps/4MP@30fps
Min. Illumination	Color : 0.001 lux@F1.2, AGC ON; B/W : 0 lux with IR
Lens	3.3~12mm
Lens Mount	M12 and D14 optional
Lens Adjustment	Fixed/manual/ OSD adjustment
S / N Ratio	≥52dB (AGC OFF)
Ingress Protection	IP66
Functions	
Function Control	OSD (COC Control)
Day & Night	ICR
WDR	Yes (120dB)
Digital NR	Yes (2D DNR)
AGC	Yes
Auto White Balance	Yes
BLC	Yes
Edge Brightness Compensation	Yes
Defogging	Yes
HLC	Yes
Sharpness	Yes
Mirror Image	Yes
Smart IR	Yes
Image Setting	Yes
Defect Correction	Auto / Manual
Language	English and Chinese
Angle Adjustment	Any angle
Others	
Power Supply	DC12V (± 10%)
Power Consumption	IR OFF : < 1W; IR ON : < 4W
Working Environment	- 20 °C ~ 50 °C, 10 % ~ 90 % (relative humidity)
Dimensions (mm)	Φ 87 x 219