

### DESCRIPTION

The TLO-NM is a speaker horn for high volume penetration. Commonly used for outdoor use, In operation, the TLO-NM provides talkback capabilities between the remote zone and Louroe base station, or with other compatible audio transmitting devices such as an AOP-SP70.



MODEL TLO-NM

### APPLICATION

- Parking Structures
- Remote Properties
- Building Peripherals
- Secured Walkways
- Gate Entry & Exits
- Docks & Piers
- Car Dealership Lots

#### IMPORTANT NOTICE

When this equipment is used as part of an audio monitoring system, the law requires that the public be given notice of AUDIO MONITORING ON THE PREMISES. A decal notice is included with each microphone shipped.



Federal Law References:  
Federal Regulations, US Code, Title 18.  
Crime and Criminal Procedure, Sec 2510.


## FEATURES

- Weather resistant for outdoor use
- High volume penetration horn speaker
- May be used in damp, moist environment
- May be mounted up to 1,000 ft. from Louroe Base station
- 30W speaker
- Mounting bracket (2 1/2" dia) for vertical and horizontal positioning

### WIRING REQUIREMENTS

- 4 Conductor consisting of:
- 2 Conductor **shielded**, 20 gauge with 22 gauge drain (microphone connection)
  - 2 Conductor **unshielded**, 18 gauge (speaker connection)
- All in the same jacket

West Penn 356 or equivalent

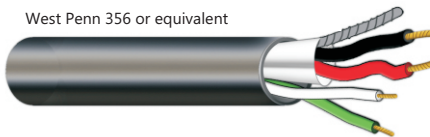

### SPECIFICATIONS

■ Power rating	30W
■ Input	70.7V constant
■ Frequency response	350 Hz to 14 kHz
■ Sensitivity	109dB (Measured at 1m, 1W @ 1kHz)
■ Material	Heavy Duty ABS Resin
■ Dimensions	11" W x 6 5/8" H x 12 3/4" D
■ Dispersion	105° x 72°
■ Weight	5 lbs 5 oz
■ Shipping Weight	7 lbs

