
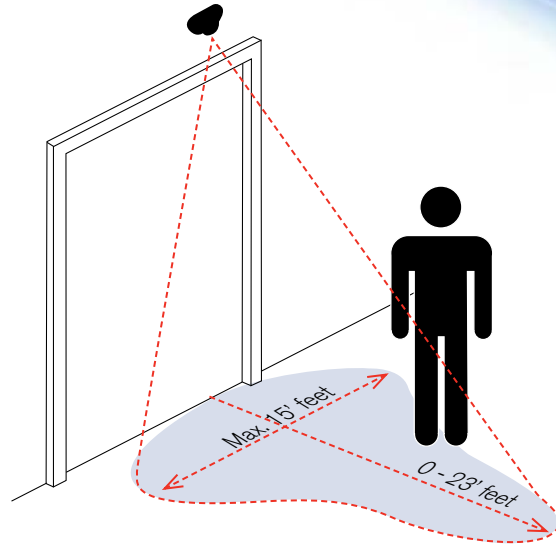


Microwave Motion Detector

The REX-MOTMIC Series

REX-MOTMIC - Microwave Sensor Switch is a sensitive detection component that emits microwave energy to detect movement. The detection field is wide (0~ 23' feet), and the performance is extremely stable and reliable.

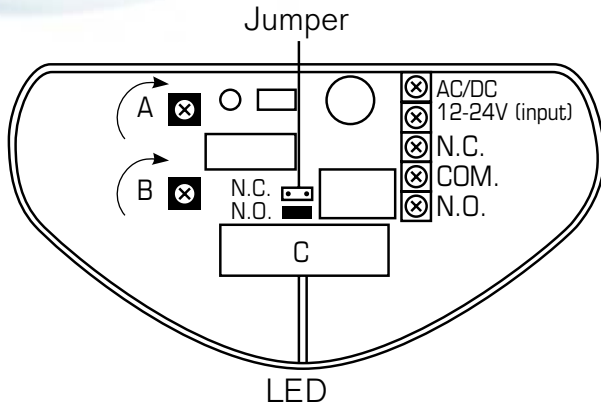


Features:

- N.O. and N.C. outputs for maximum applicability
- Integrated adjustable time delay allows for door opening time selection within the switch
- Dual voltage means reduced inventory costs


Specifications:

- POWER INPUT:** 12 V-24VAC/DC (self-regulating)
- MAXIMUM CURRENT:** 80 mA
- FREQUENCY:** 10.525 GHz
- RELAY RATED:** 3A, 125VAC/30VDC
- RELAY ACTUATION TIME:** 0.5S ~ 4S
- SENSOR ANGLE:** 7.5° ~ 82.5°
- OPERATING TEMPERATURE RANGE:** -4°F ~ 131°F
- DIMENSIONS:** 4-7/8" (W) x 2-7/8" (H) x 2-1/2" (D)

Turn (A) clockwise to increase the antenna detection range, or turn counter-clockwise to decrease the antenna detection range.

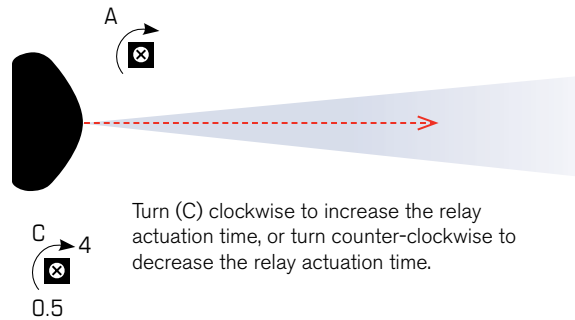

Turn (C) clockwise to increase the relay actuation time, or turn counter-clockwise to decrease the relay actuation time.

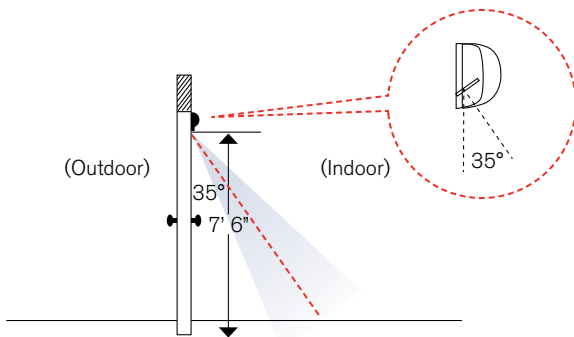

Microwave Sensor Switch
Part # **REX-MOTMIC**



The IP Lock and Security Company

2270 Camino Vida Roble
Carlsbad, CA 92011

Tel: 760-929-9596

Email: Sales@BlueWaveSecurity.com

Distributed by:

